




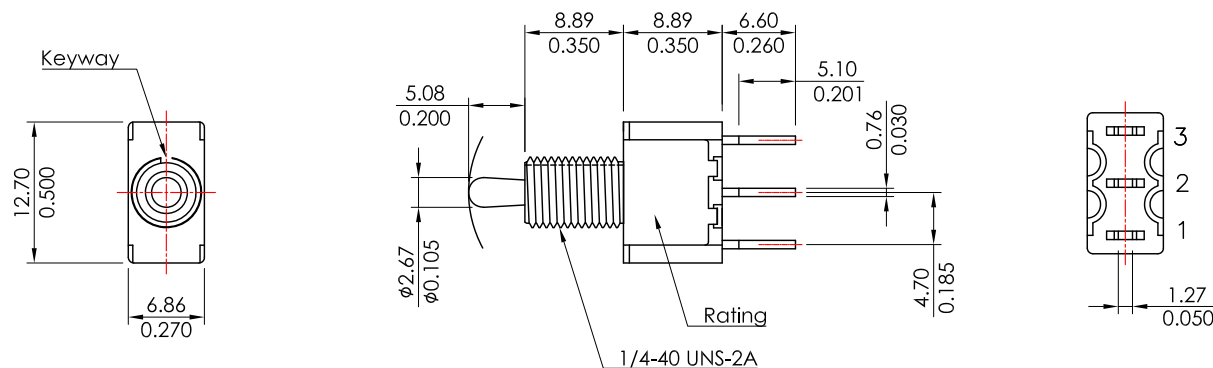

P.C.B. LAYOUT



MOUNTING HOLE



SWITCH FUNCTION

Model No.	POS.1	POS.2	POS.3
T1013	ON	OFF	ON
Term Com.	2 - 3	OPEN	2 - 1
Schematic			

SPECIFICATION

Rating: 0.4VA Max. @20V Max (AC or DC).

Contact resistance: 10m Ω Max. initial @ 2-4V DC
100mA for both Silver and Gold plated contacts.

Insulation resistance: 1,000M Ω Min.

Withstand voltage: 1,000V R.M.S. Min. @sea level.

Operating temperature: -30°C ~ +85°C.

Mechanical Life: 40,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

MATERIAL

Case: Diallyl phthalate (DAP)(UL94V-0).

Actuator: Brass, Chrome plated.

Bushing: Brass, Nickel plated.

Housing: Stainless steel.

Terminal & Contact: Brass, Gold plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$
.X $\pm$ 0.30
.XX $\pm$ 0.20
.XXX $\pm$
ANG $\pm$

照片框

ORDER INFORMATION

TGSW47-DPB051-1X03-LF

SERIES



5.08mm

PANEL BACK
DIP 180°




03 WAY

LEADFREE


DESCRIPTION:



A-A'

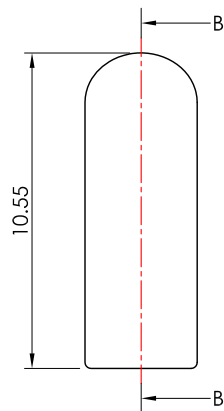

B-B'

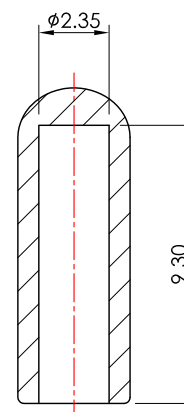

CAP TYPE (L / L1)	
□	10.55mm
T	8.20mm

CAP COLOR	
BK	Black
WH	White
GY	Gray
RD	Red
YL	Yellow

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TGSW47-DPB051CPcc-1X03-LF

SERIES

DIP 180°
PANEL BACK

5.08mm

LEADFREE

03 WAY

BK:BLACK
YL:YELLOW
CAP COVER

DESCRIPTION: