




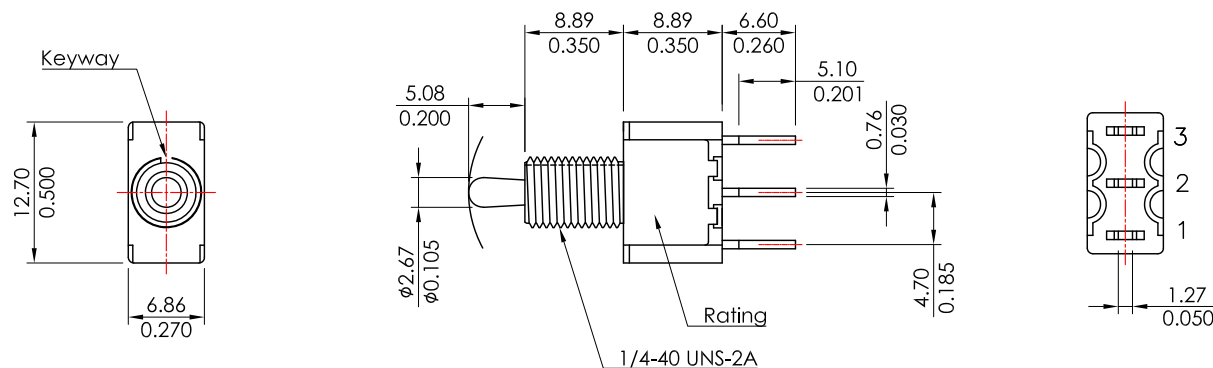

P.C.B. LAYOUT



MOUNTING HOLE



SWITCH FUNCTION

Model No.	POS.1	POS.2	POS.3
T1013	ON	OFF	ON
Term Com.	2 - 3	OPEN	2 - 1
Schematic			

SPECIFICATION

Rating: 0.4VA Max. @20V Max (AC or DC).

Contact resistance: 10mΩ Max. initial @ 2-4V DC
100mA for both Silver and Gold plated contacts.

Insulation resistance: 1,000MΩ Min.

Withstand voltage: 1,000V R.M.S. Min. @sea level.

Operating temperature: -30°C ~ +85°C.

Mechanical Life: 40,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

MATERIAL

Case: Diallyl phthalate (DAP)(UL94V-0).

Actuator: Brass, Chrome plated.

Bushing: Brass, Nickel plated.

Housing: Stainless steel.

Terminal & Contact: Brass, Gold plated.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TGSW47-DPB051-1X03-LF

SERIES




5.08mm

PANEL BACK
DIP 180°

03 WAY

LEADFREE

DESCRIPTION:

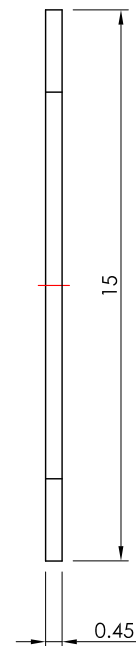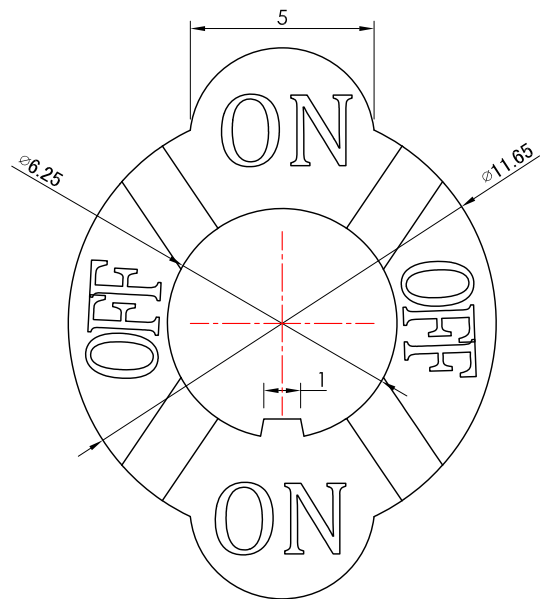

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TGSW47-DPB051PL-1X03-LF

SERIES

LEADFREE

03 WAY

PLATE

5.08mm

PANEL BACK

DIP 180°

DESCRIPTION: