



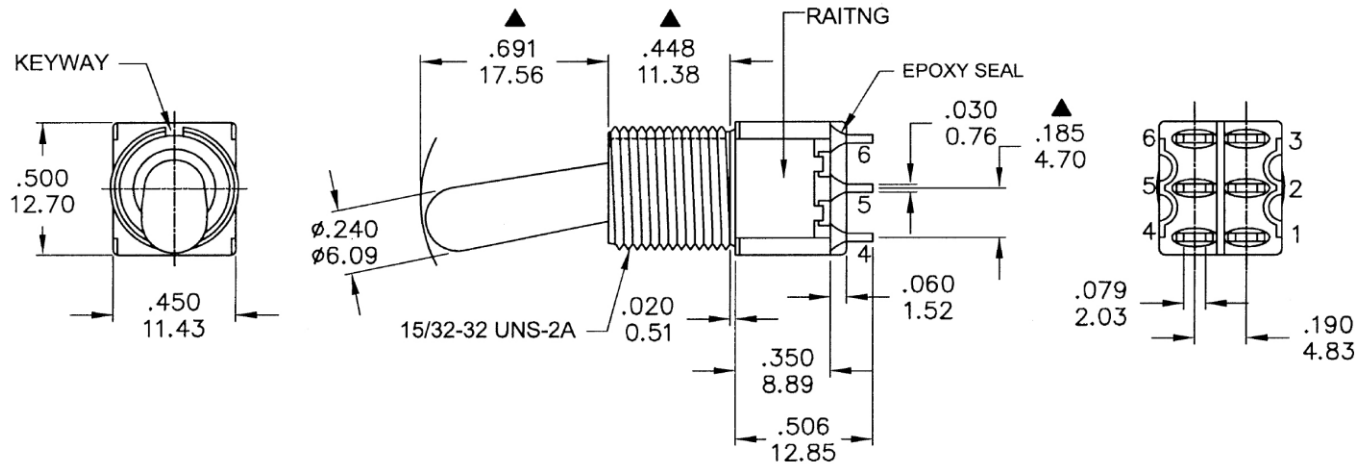

Model No.	POS.1	POS.2	POS.3
1MD3	ON	OFF	ON
Term. Comm.	2-3,5-6		2-1,5-4
SCHEMATIC		OPEN	


SWITCH FUNCTION

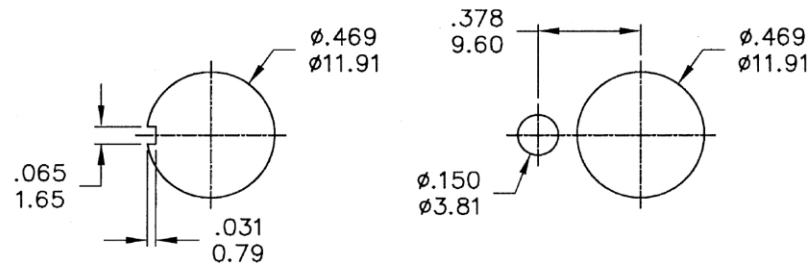

Without locking ring.

With standard locking ring.

PANEL MOUNTING

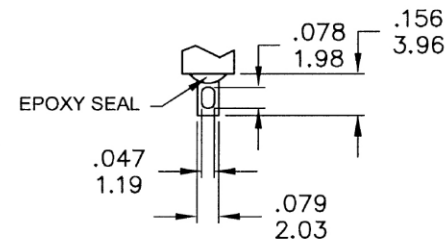

SOLDER LUG

SPECIFICATIONS

MECHANICAL LIFE: 40,000 make-and-break cycles.

CONTACT RESISTANCE: 10mΩ max. initial @ 2-4VDC
100mA for both silver and gold plated contacts.

INSULATION RESISTANCE: 1,000MΩ min.

DIELECTRIC STRENGTH: 1,000 V RMS@sea level.

OPERATING TEMPERATURE: -30°C to 85°C.

MATERIALS

CASE: Dially phthalate (DAP) (UL94v-0).

ACTUATOR: Brass,chrome plated.

BUSHING: Brass,nickel plated.

HOUSING: Stainless Steel.

TERMINAL/CONTACT: Silver or gold plated.

SWITCH SUPPORT : Brass , Tin plated.

RoHS : 2002/95/EC

	CONTACT MATERIAL	TERMINAL PLATING	RATINGS
Q	Silver	Q = Silver	5 Amps @120 VAC or 28 VDC 2 Amps @250VAC
S		S = Silver,pure-tin	
C	Gold over Silver	C = Gold over silver	
K		K = Gold over silver,pure-tin	0.4 Volt-Amps(VA) max. @20V max. (AC or DC)
R	Gold	R = Gold	
G		G = Gold,pure-tin	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TGSW47-SPB175-2X03-LF

SERIES

LEADFREE

06 WAY

PANEL BACK

SOLDER

DESCRIPTION: