



公T插

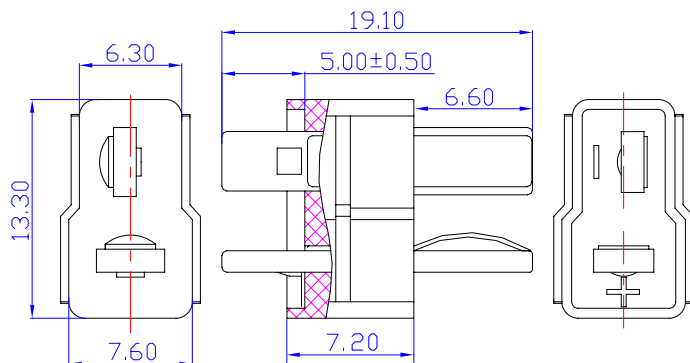

母T插

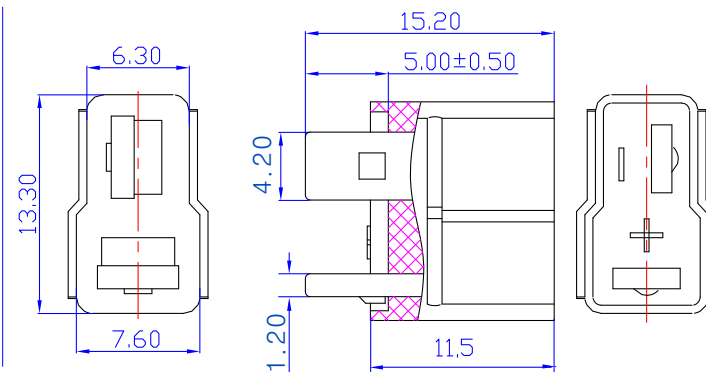

注：未标注线性尺寸公差按照GB/T1804-m级
典型特性 (Typical Characteristic)

主体材质 Body material	铜 Brass	绝缘体材质 Insulation material	PA6
表面镀层 Surface coating	镀金 Gold plated	最大电流值 Current	50A
焊接温度 Solder Temperature	450 °C	焊接时间 Solder Time	3 s (秒)
插拔力 Insertion force	2.5~5.0kg	绝缘阻抗 Insulation resistance	>500 MΩ

特点 (Feature)

高可靠性
Highreliability

高稳定性
Highstability

经济实用
Economicaandpractical

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TP4-xS-02-LF
SERIES T LEADFREE
02 WAY
SOLDER
P: MALE
S: FEMALE

DESCRIPTION: