
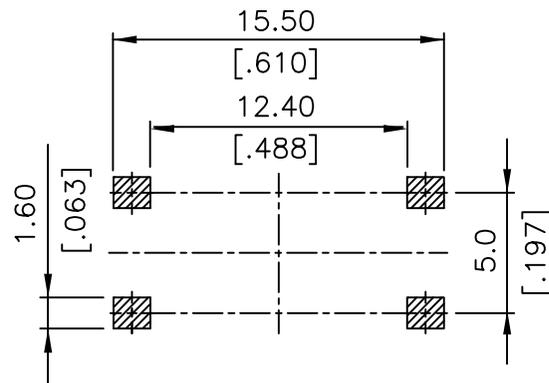


NOTE:


1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.

2. GENERAL TOLERANCES MAX. ±0.20mm.



3. MATERIAL & □: SEE PAGE 3 OF 3.

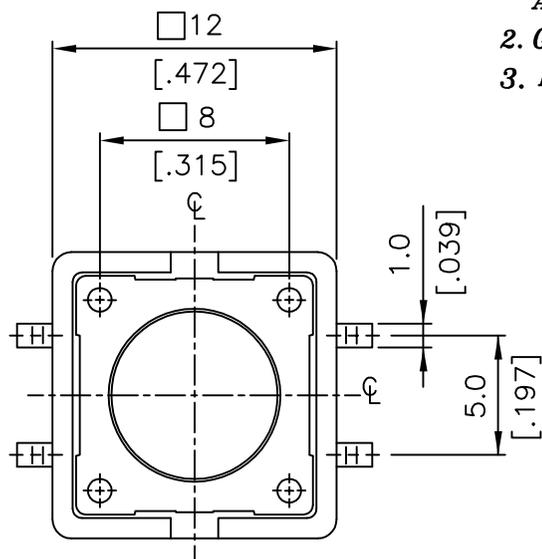

P.C.B. LAYOUT

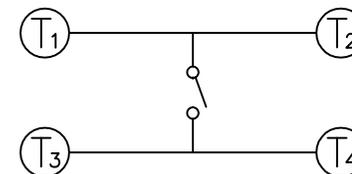

CIRCUIT DIAGRAM

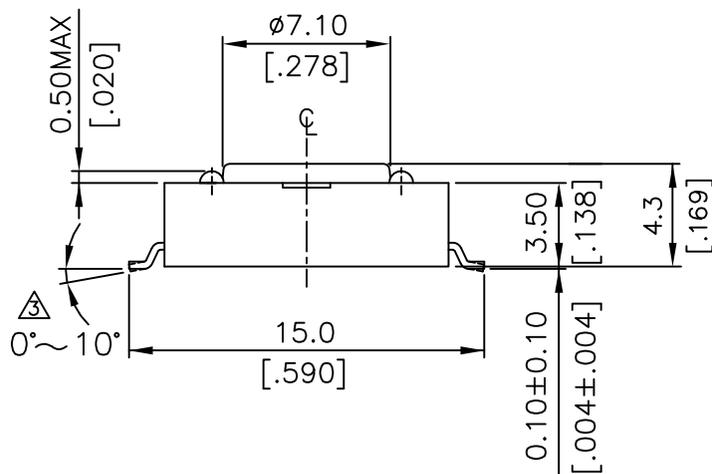

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ±

UNIT / mm SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PJECTION



ORDER INFORMATION




TSW1212-V043R-260-LF

SERIES REEL HIGH 4.3mm 180°SMT LEADFREE 260g

DESCRIPTION: TACTILE SWITCH SMT TYPE 12X12

煜倫股份有限公司

www.morethanall.com

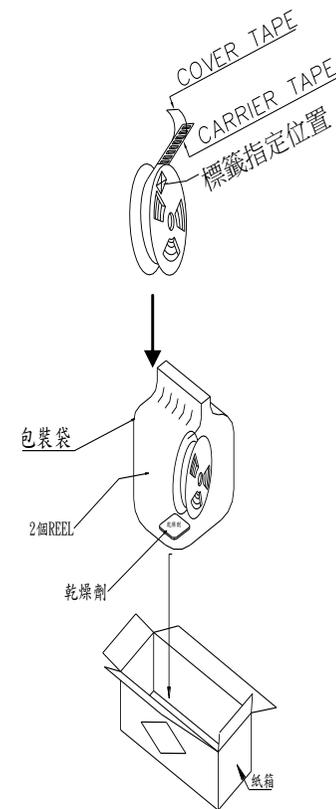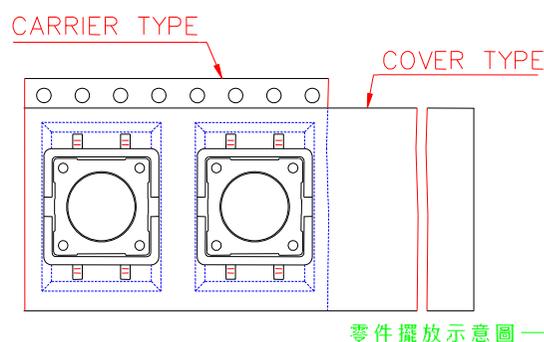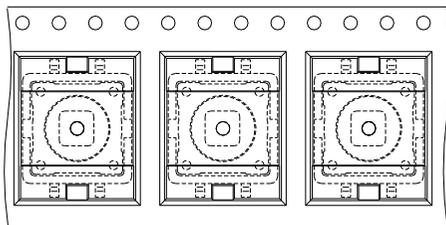

1. CARRIER TAPE 須預留 160mm 長(約 10 個 Pitch 槽孔), 才可擺入成品, COVER TAPE 亦同。
2. 擺完成品後, 尾端亦須最少預留:
 - 2.1. CARRIER TAPE~240mm(約 15 個 Pitch 槽孔)。
 - 2.2. COVER TAPE~配合 CARRIER TAPE 長度覆蓋後, 需再超出 160mm 以上。
3. COVER TAPE 與 CARRIER 覆蓋附著強度需在 10~130g。(撕開速率 1 分鐘在 300±10mm、撕開方向與膠捲相反, 角度介於 165~180 度)
4. 如圖所示, 將成品置入 CARRIER TAPE(承載塑膠料帶)內, 以 COVER TAPE(覆蓋用膠帶)貼附於上, 並配合帶裝機自動捲繞於塑膠 REEL 收料, 定量包裝後再放入包裝外箱。
5. COVER TAPE 不可有浮起及未貼附於 CARRIER TAPE 或成品放置浮起之現象發生。
6. 零箱部份, 出貨需以緩衝物填滿。
7. REEL 包裝時, 需用包裝袋封裝[2 盤裝 1 袋]; 袋裡需加 1 包乾燥劑~
8. 每盤 REEL 中的標籤, 需依示意圖中方式張貼才可。

產 品 型 號	包 裝 容 量		
	Pcs. /REEL	REEL/箱	Pcs. /箱
TSW1212-V043R-260	700		10500

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

DRAWING BY CY

X, ±

CHECKED BY GENIUS

X, ±

UNIT / mm

SCALE 1 : 1

.XX ±


DATE

.XXX ±

ANG ±

SIZE A4

PPOJECTION



ORDER INFORMATION

TSW1212-V043R-260-LF

SERIES

LEADFREE

260g

REEL

HIGH 4.3mm

180°SMT

DESCRIPTION: TACTILE SWITCH SMT TYPE 12X12

www.morethanall.com