
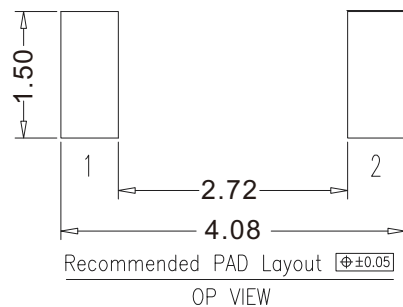


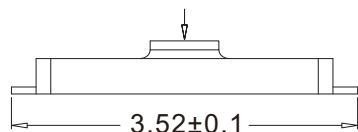


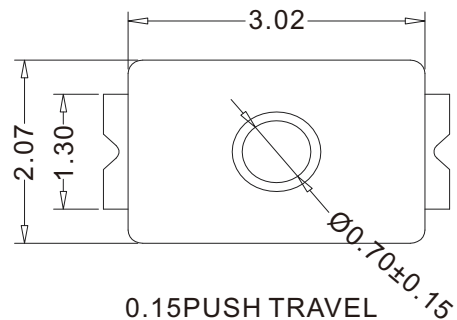

SPECIFICATIONS

1. Operating temperature range: -30°C to $+85^{\circ}\text{C}$
2. Rating: DC12V 50mA
3. Insulation resistance: $100\text{M}\Omega$ min 100V DC
4. Dielectric strength: 250V AC for 1min.
5. Contact resistance: $500\text{m}\Omega$ Max
6. Operating force: $180 \pm 30\text{gf}$
7. Travel: $0.15 \pm 0.05\text{mm}$
8. Operating life: 100,000 Cycle Min

5	按键	聚胺树脂	1	黑色
4	膜	聚酰亚胺	1	黄色
3	弹片	SUS301	2	镀银
2	底座	PPA	1	黑色
1	端子	磷铜C5191	1	镀银
编号	部件名称	材料名称	数量	备注

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW23-V06-180-LF

SERIES

LEADFREE

180g

HIGH 0.60mm

180°SMT

DESCRIPTION: TACT SWITCH