

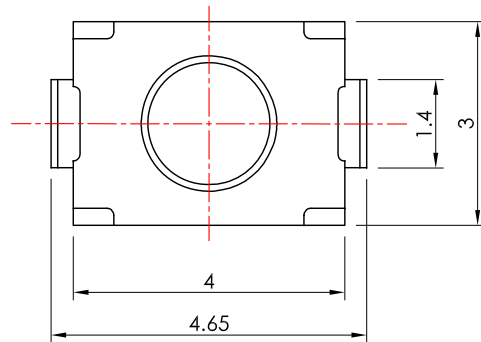




*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

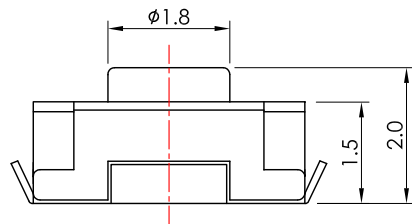

SCHEMATIC



P.C.B. LAYOUT

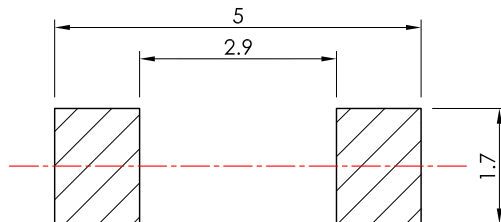

SPECIFICATION

Rating: 50mA 12V DC.

Travel: 0.15±0.1mm.

Contact resistance: 100mΩ Max.(Initial)

Insulation resistance: 100MΩ Min. at 100V DC.

Operating temperature: -20°C ~ +70°C.

Operating force: 160±50g.

Minimum load: 10μA 1V DC.(reference only)

Life: 100,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note 1: Unwashable, don't be immersed by epoxy and organic solvent.

Note 2: Please check the actual size, do not scale the drawing page.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW34-V20J1-160-LF

SERIES

J FOOT

160g

HIGH 2.0mm

180°SMT

LEADFREE

DESCRIPTION: **Tact Switch**