

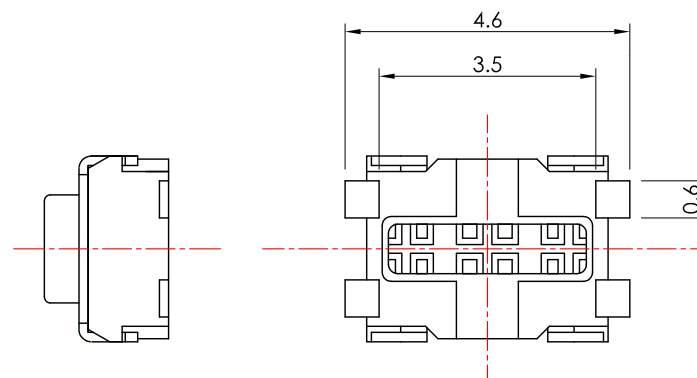
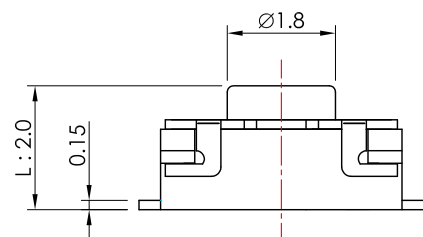


*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。


Below is our main specification if different from catalog.

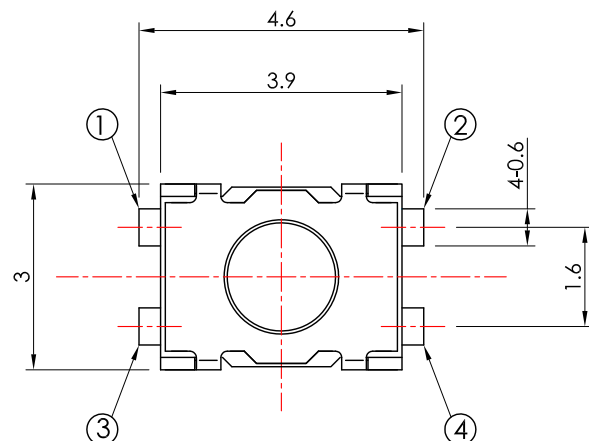

CIRCUIT DIAGRAM



P.C.B. LAYOUT

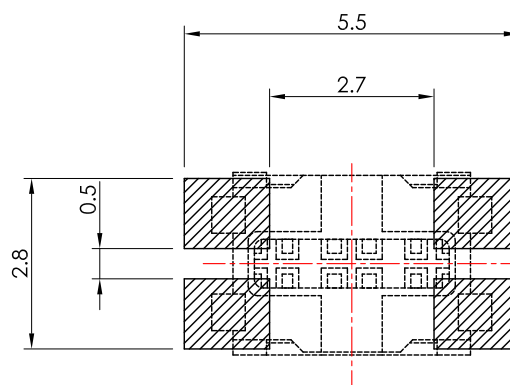

MODEL NO. (L)
2
1.8
2.5
4

OPERATING FORCE
160, 250, 400

SPECIFICATION

Rating: 50mA 12V DC.

Function: OFF-(ON).

Travel: 0.2±0.1mm.

Contact resistance: 100mΩ Max.(initial)

Operating force: 160±50g.

Minimum load: 10μA 1V DC.(reference only)

Life: 100,000 Cycles.

Soldering temperature: 250°C Max. for 3 sec.

Soldering time: 1 time only.

Note1: Unwashable, don't be immersed by epoxy and organic solvent.

Note2: Please check the actual size, do not scale the drawing page.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.30

.X ± 0.30

.XX ± 0.20

.XXX ± 0.10

ANG ± 1°

PPOJECTION

照片框

ORDER INFORMATION

TSW34-VxxE2-xxx-LF

SERIES

180°SMT

20:HIGH 2.0mm

18:HIGH 1.8mm

25:HIGH 2.5mm

40:HIGH 4.0mm

LEADFREE

160:160g

250:250g

400:400g

EAR

DESCRIPTION: