



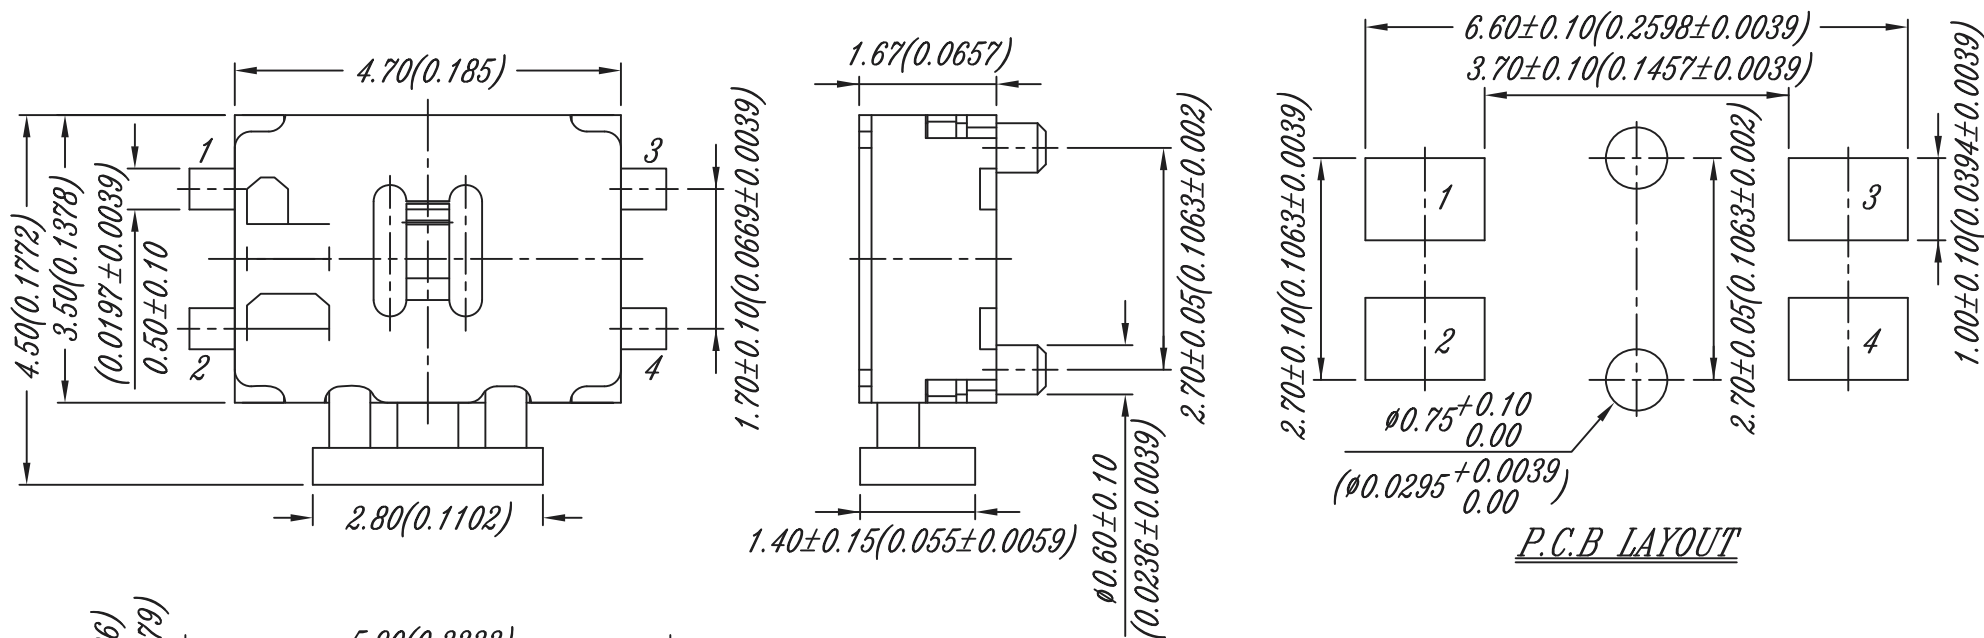

P.C.B LAYOUT

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX.±0.20mm.
3. MATERIAL & □: SEE PAGE 3 OF 3.

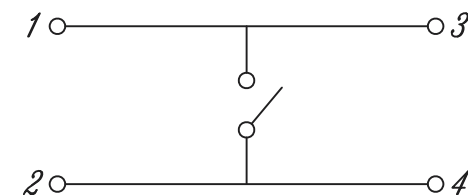

CIRCUIT DIAGRAM

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW34-W16PR-220-LF

SERIES

LEADFREE

220g



REEL

POST

HIGH 1.67mm

90°SMT

DESCRIPTION: TINY SIDE PUSH SWITCH (4. 7X3. 5) (MECHANICAL CONTACT TYPE)

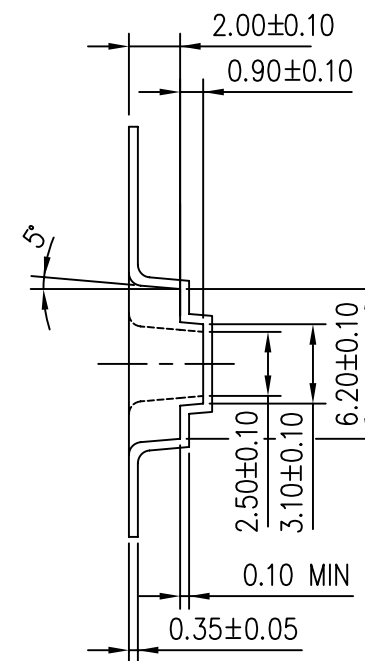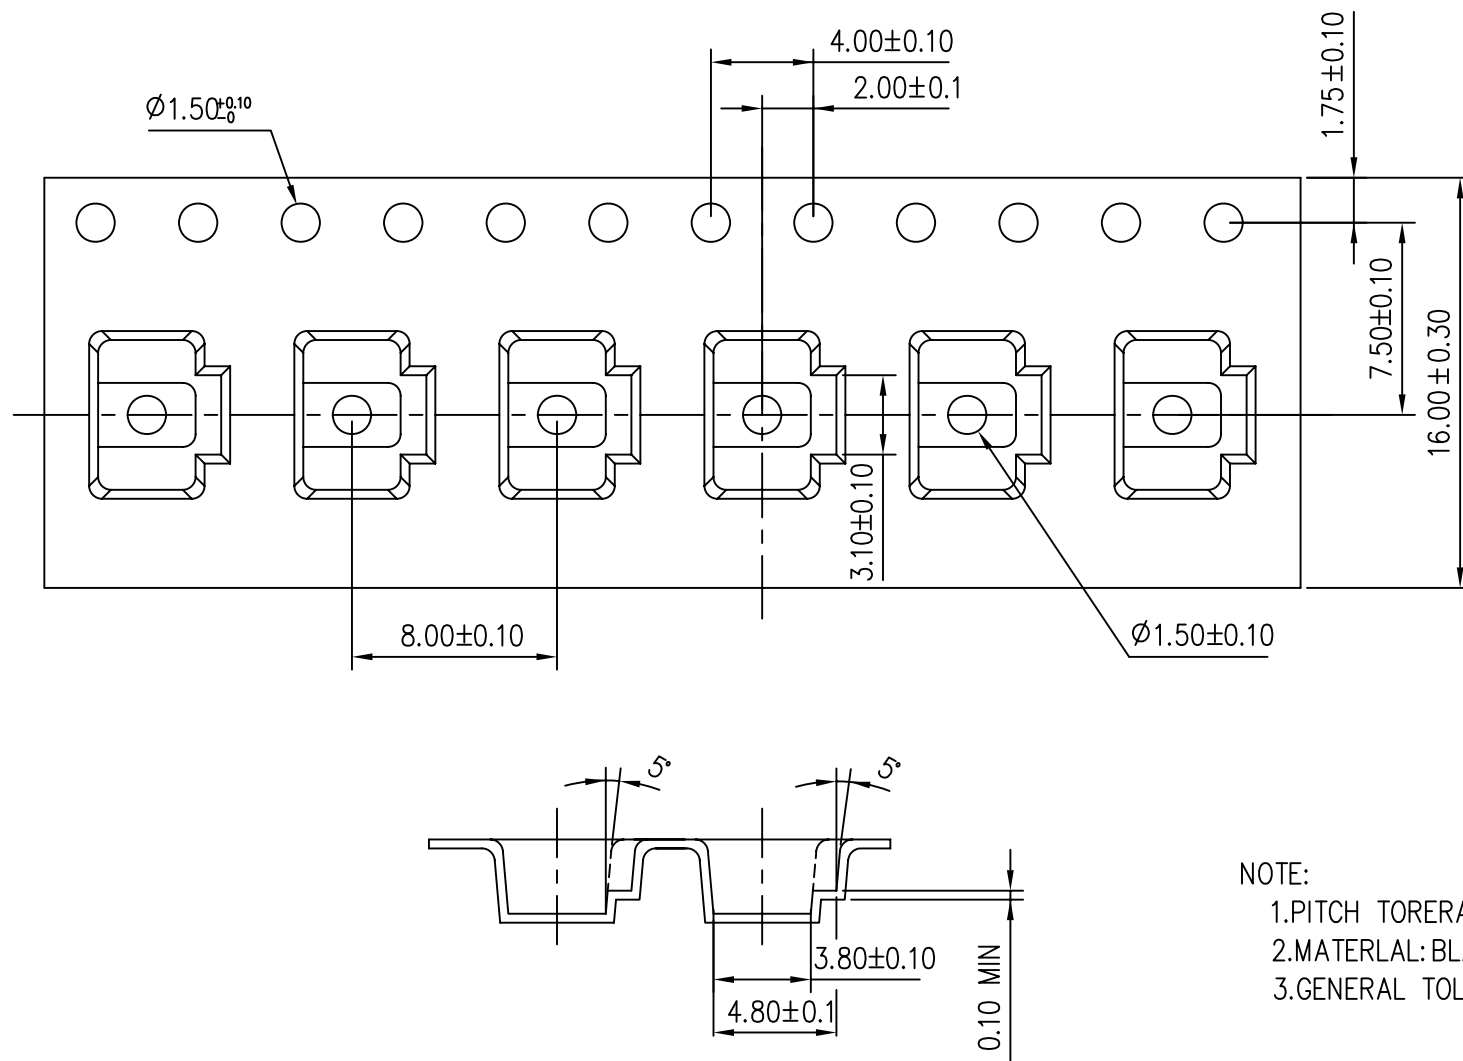

NOTE:

- 1.PITCH TORERANCE OVER ANY 10 PITCH ± 200 mm.
- 2.MATERAL: BLACK-THICKNESS: 0.35 ± 0.05 mm
- 3.GENERAL TOLERANCES MAX $\pm :0.10$ mm

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, $\pm$
.X $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

TSW34-W16PR-220-LF

SERIES

LEADFREE

220g

REEL

POST

HIGH 1.67mm

90°SMT

DESCRIPTION: TINY SIDE PUSH SWITCH (4. 7X3. 5) (MECHANICAL CONTACT TYPE)