
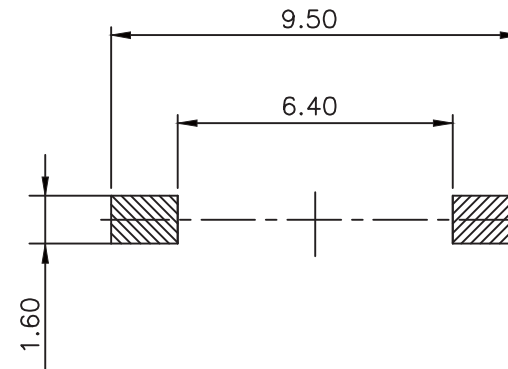




NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS, BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES MAX.±0.20mm.

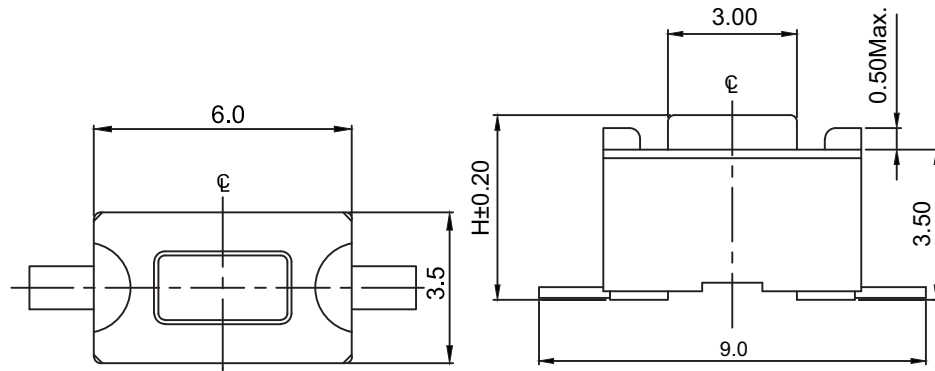

CIRCUIT DIAGRAM

P.C.B. LAYOUT

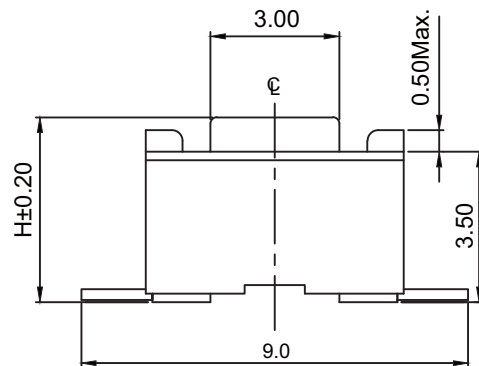

TSW36-V50X-xxx	5.0 [.197]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
TSW36-V43X-xxx	4.3 [.169]	Y	YELLOW 520g
		S	SALMON 320g
		R	RED 260g
		N	BROWN 160g
PROD. NO.	H	COLOR FOR OPERATING FORCE	

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW36-VxxX-xxx-LF

SERIES

LEADFREE

160:160g

520:520g

NON POST

43:HIGH 4.3mm

50:HIGH 5.0mm

180°SMT

DESCRIPTION: TACTILE SWITCH (3.5x6) (S.M.T TYPE)