



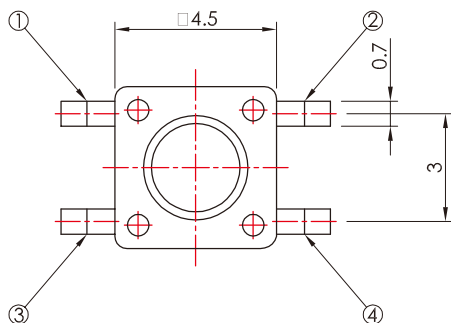

CIRCUIT DIAGRAM



SPECIFICATION

Rating: 50mA 12V DC Max.

Circuit: SPST

Travel: 0.25±0.1mm.

Contact resistance: 100mΩ Max (initial).

Operating force: 160±50g.



Life: 100,000 Cycles Min.

Minimum load: 10mA 3.3V DC. (reference only)


Soldering temperature: 250° C Max for 3 Sec.

Soldering time: 1 time only.

Note: Not washable, don't immerge into epoxy and organic solvent.

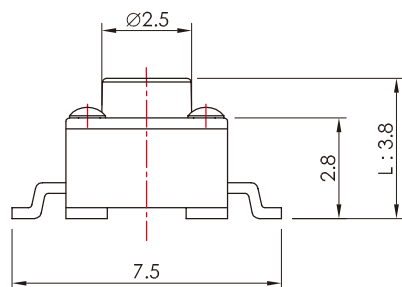

P.C. BOARD MOUNTING HOLE DIMENSIONS

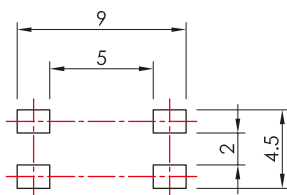

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW44-V38-160-LF

SERIES LEADFREE
160g
HIGH 3.8mm
180°SMT

DESCRIPTION: Tact Switch