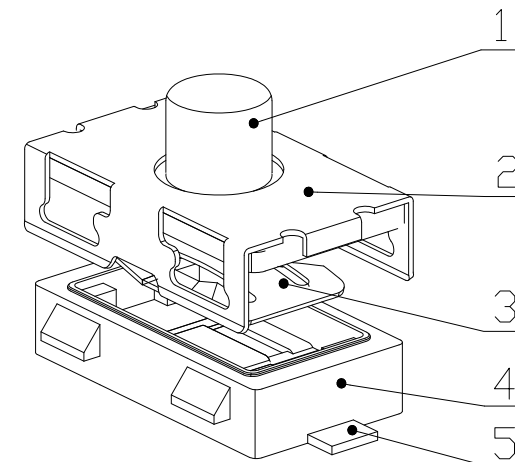
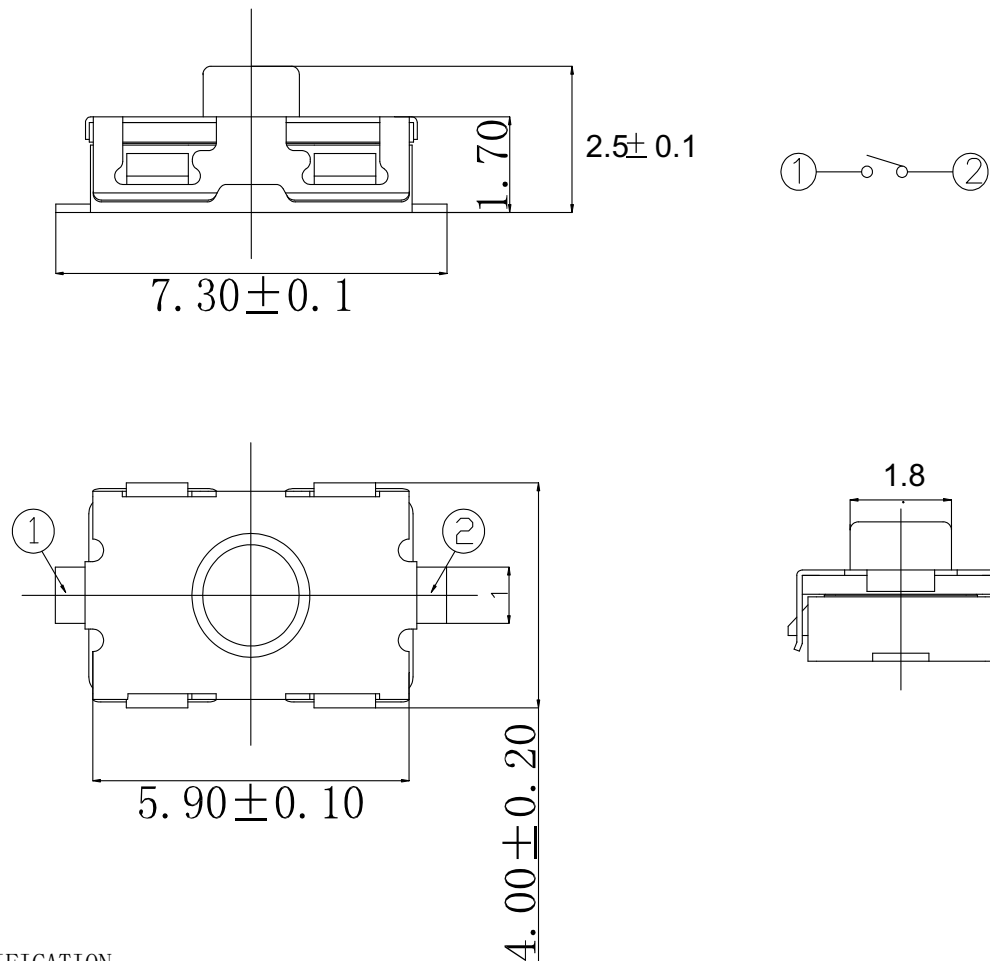


LAYOUT

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 260gf ± 70gf
6. Operating life: 100,000 cycles

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.

5	TERMINAL (端子)	1	H65	Ag plating
4	HOUSING (基座)	1	PA6T	—
3	CONTACT FORM (弹片)	1	SUS	Ag plating
2	COVER (盖板)	1	SUS	
1	STEM (按钮)	1	SILICONE	
NO (序号)	PART NAME (部件名)	QTY (数量)	MATERIAL (材料)	REMARK (备注)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW46-V25X-260-LF

SERIES

260g

LEADFREE

NON POST

HIGH 2.5mm

180°SMT

DESCRIPTION: TACT SWITCH