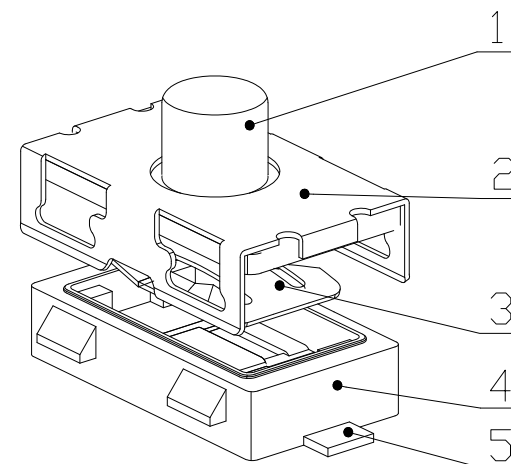

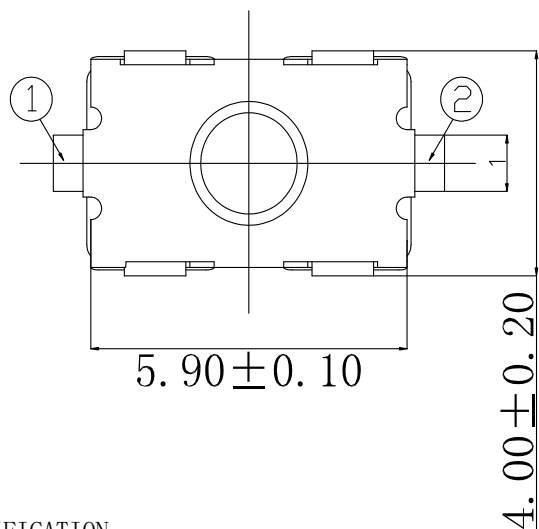

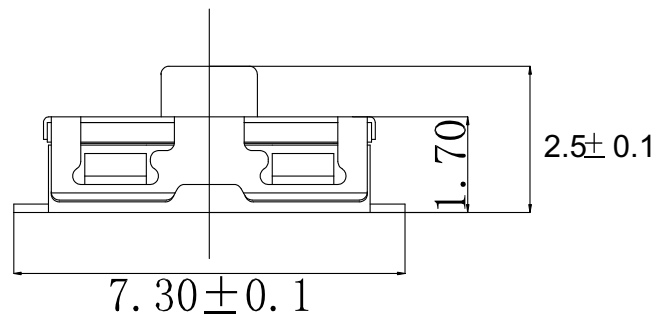


LAYOUT

SPECIFICATION

1. Rating: DC 12V 50mA Max
2. Contact resistance: 100mΩ MAX
3. Insulation resistance: 100MΩ Min
4. Dielectric strength: 250VAC/min
5. Operating force: 260gf ± 70gf
6. Operating life: 100,000 cycles

NOTE:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
BRACKETED DIMENSIONS ARE IN INCHES.
2. GENERAL TOLERANCES ±0.20mm.

5	TERMINAL (端子)	1	H65	Ag plating
4	HOUSING (基座)	1	PA6T	—
3	CONTACT FORM (弹片)	1	SUS	Ag plating
2	COVER (盖板)	1	SUS	
1	STEM (按钮)	1	SILICONE	
NO (序号)	PART NAME (部件名)	QTY (数量)	MATERIAL (材料)	REMARK (备注)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

TSW46-V25XR-260-LF

SERIES

REEL

NON POST

HIGH 2.5mm


180°SMT

260g





LEADFREE

DESCRIPTION: TACT SWITCH

* THE DIMENSION OF CARRIER TAPE, COVER TAPE AND REEL *

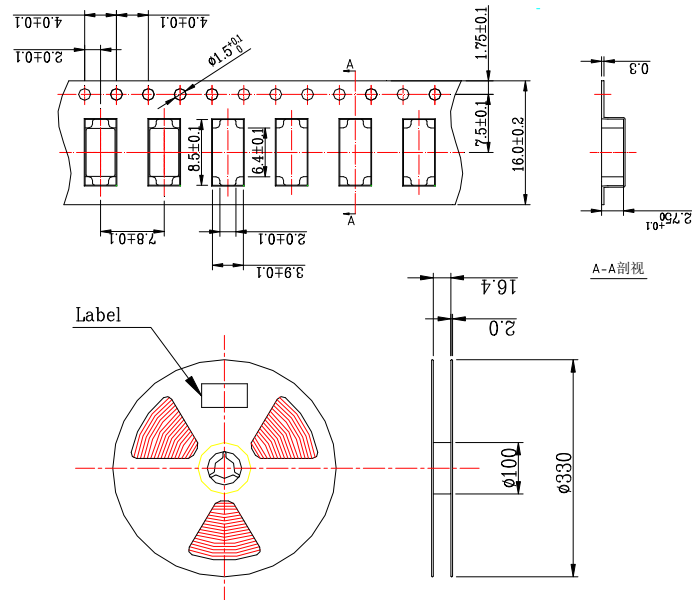


* THE SPECIFICATION FOR PACKAGING *

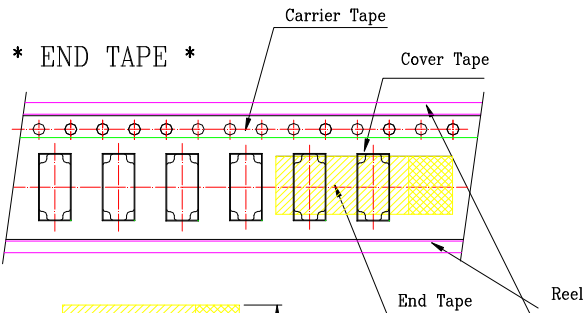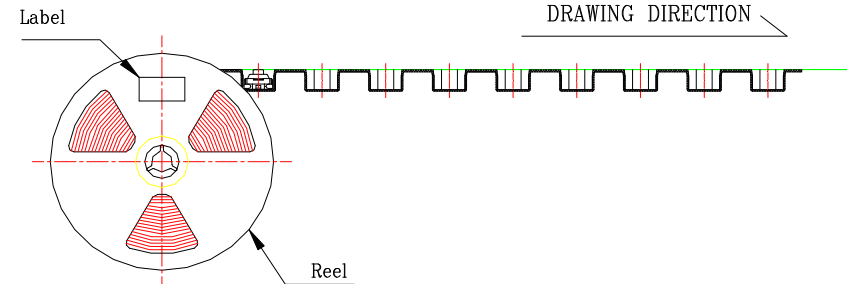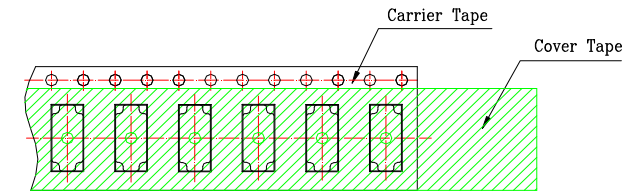

End

* THE SPECIFICATION FOR PACKAGING *

Start

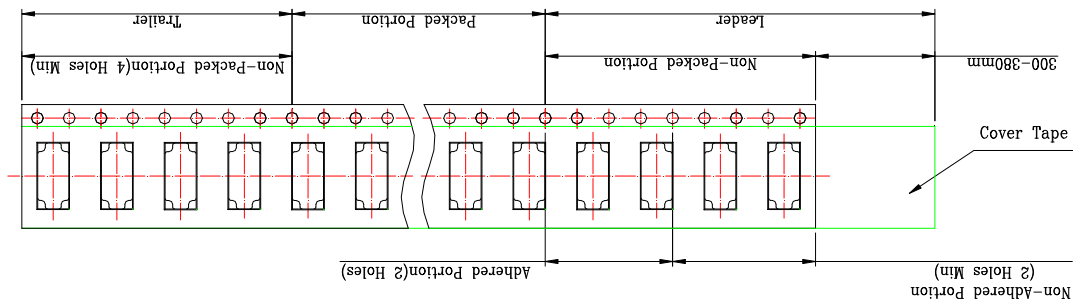

NOTE

1. 3K pcs SWITCHES PER 1 REEL
2. GENERAL TOLERANCE : 0.2mm

REFERENCE DRAWING

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

X, ±

CHECKED BY GENIUS

.X ±

UNIT / mm

SCALE 1 : 1

.XX ±

DATE

.XXX ±

SIZE A4

PPOJECTION

ANG ±

ORDER INFORMATION

TSW46-V25XR-260-LF

SERIES

LEADFREE

260g

REEL

NON POST

HIGH 2.5mm

180°SMT

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: TACT SWITCH