

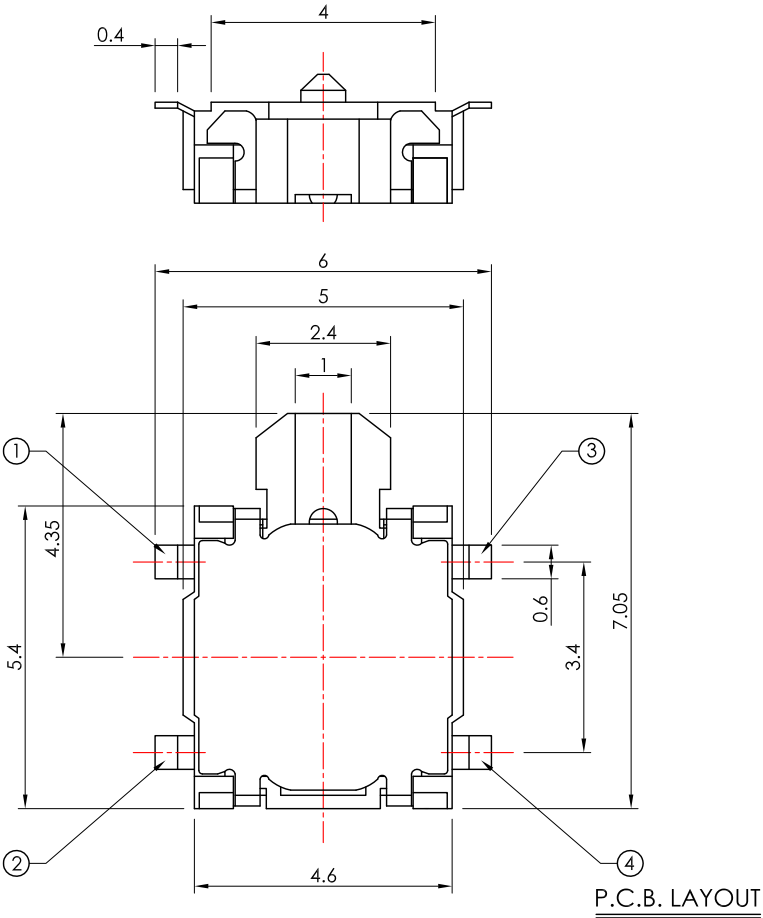


*開關產品未經SWITRONIC同意，請勿拆解，否則無法負品質及安全責任。
Please do not decompose the switch without any permission from SWITRONIC,
otherwise the quality and safety responsibility could not be guaranteed.
*本圖面若與目錄之規格尺寸不符，以本圖面規格尺寸為主。
Below is our main specification if different from catalog.

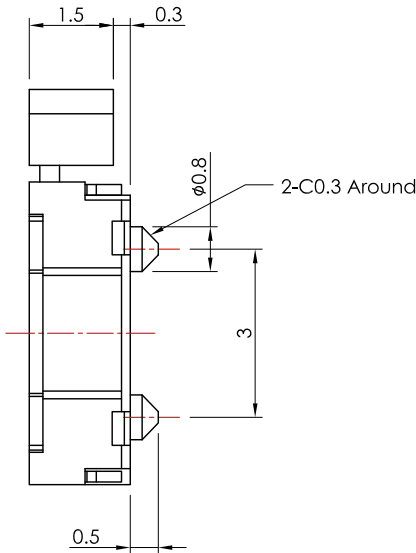


CIRCUIT DIAGRAM



SPECIFICATION

Rating: 50mA 12V DC.
Travel: 0.3±0.15mm.
Contact resistance: 500mΩ Max.
Operating force: 180+80 / -40g.
Minimum load: 10mA 3.3V DC.(reference only)
Life: 50,000 Cycles.
Soldering temperature: 250°C Max. for 3 sec.
Soldering time: 1 time only.
Note1: Unwashable, don't be immersed by epoxy and organic solvent.
Note2: Please check the actual size, do not scale the drawing page.

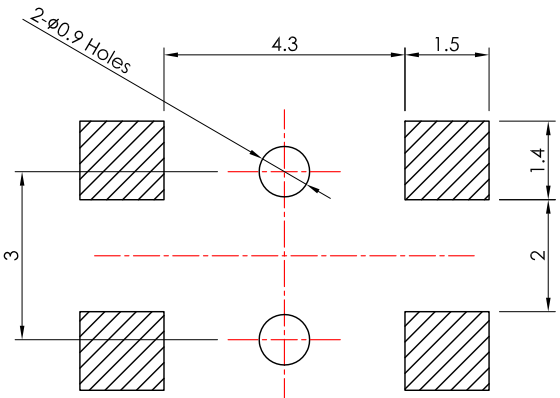

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TSW55-W18P-180-LF

SERIES

180g

POST

HIGH 1.80mm

90°SMT

LEADFREE

DESCRIPTION: Tact Switch