


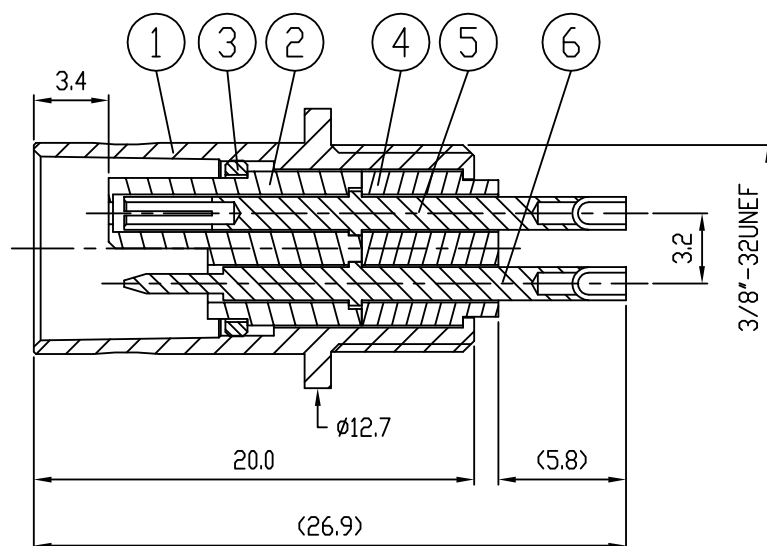


△ *註：1. 中心針剖 L 溝與主體剖單邊應同一方向

2. 主體剖單邊的平面上要釘 2 點

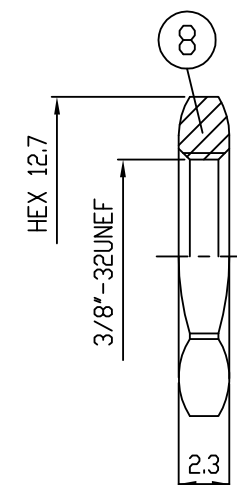

Recommend Mounting Hole

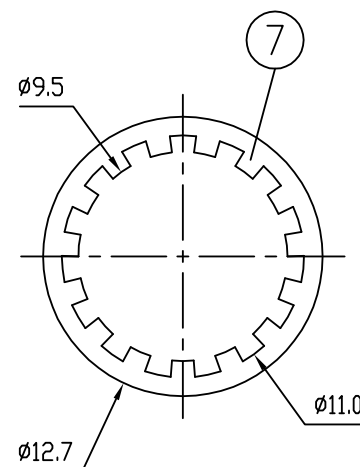

RoHS 適合品
(RoHS Compliant)
Cd ≤ 75 ppm
Pb ≤ 4 wt%

8	NUT	BRASS	1	NICKEL	C3604
7	TEECH WASHER	Fe	1	NICKEL	JIS G3141
6	CENTER PIN	Phosphor Bronze	1	GOLD	C5441
5	CENTER PIN	Phosphor Bronze	1	GOLD	C5441
4	INSULATOR	PBT	1	NICKEL	PBT 4815
3	RETAINING HOLDER	BRASS	1	NICKEL	C3604
2	INSULATOR	PBT	1		PBT 4815
1	BODY	BRASS	1	NICKEL	C3604
NO	DESCRIPTION	MATERIAL	Q'TY	FINISH	CODE #

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

TWBNC-JSPANW-50-LF

SERIES JACK
LEADFREE
50 OHM
WASHER
NUT
PANEL FRONT
SOLDER

DESCRIPTION: BNC TWINAX Jack panel Mount