

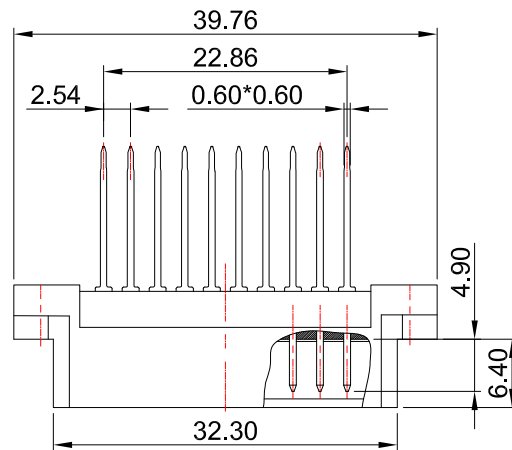


Notes:

1. Current Rating : 2.0A
2. Contact Resistance : 20mΩ Max.
3. Insulator Resistance : 1000MΩ Min
4. Withstanding Voltage : 1000V AC for 1 Minute.
5. Temperature Range : -55°C~+125°C

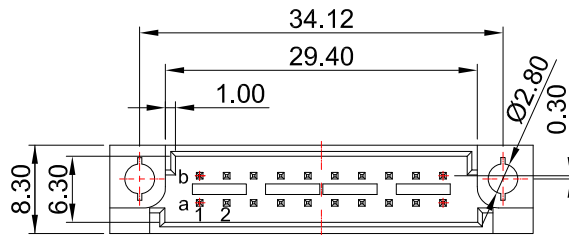

DIM. H
13 = 13.0mm
15 = 15.0mm
17 = 17.0mm

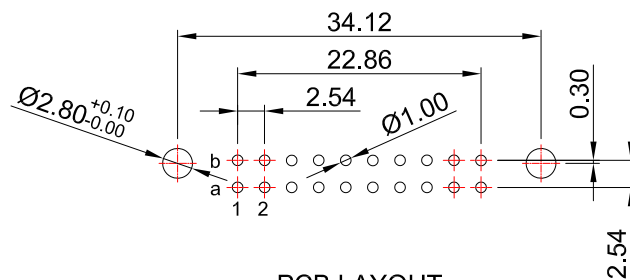

PCB LAYOUT

2	Contact	BRASS	xx
1	Housing	PBT Beige, UL 94V-0	1
No.	Part Name	Specifications	Qt'y

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

X. ± 0.25

CHECKED BY GENIUS

.X ± 0.20

UNIT / mm

SCALE 1 : 1

.XX ± 0.15

DATE

.XXX ± 0.02

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UB-PDxx-2X10-LF
SERIES LEADFREE
20 WAY
13:DIP 13.0mm
15:DIP 15.0mm
17:DIP 17.0mm
MALE DIP 180°

DESCRIPTION: DIN41612 DIP Male Vertical Type