
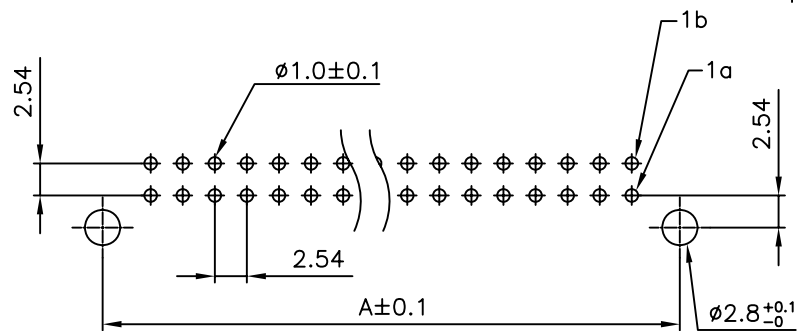
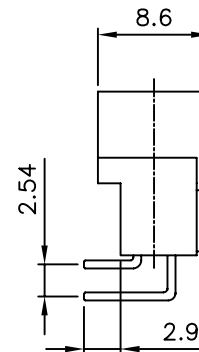
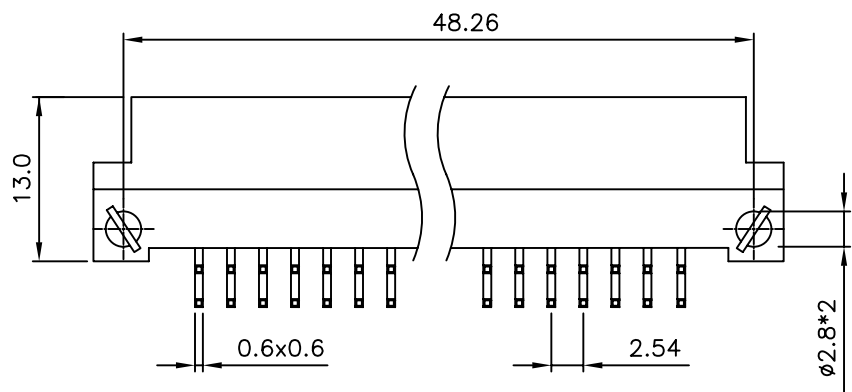


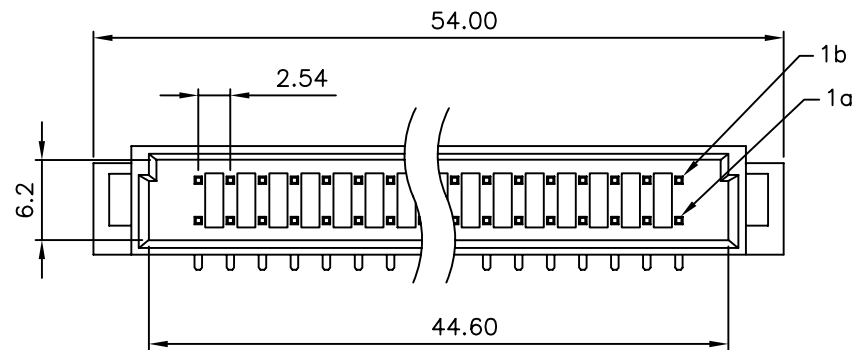

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: $\pm 0.10\text{mm}$

SPECIFICATION

MATERIAL

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass Gold plated

CONTACT PLATING

S=1u" gold on mating length, 100u" tin on solder
tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X ± 0.30
.XX ± 0.20
.XXX $\pm$
ANG $\pm$



ORDER INFORMATION

UB-PR-2X16-LF
SERIES | 32WAY | LEADFREE
DIP 90°
MALE

DESCRIPTION: DIN 41612 (DUAL ROW) MALE 32PIN