

RECOMMENDED P.C.B LAYOUT(TOP VIEW)  
TOLERANCES: ±0.10mm

**SPECIFICATION**

**MATERIAL**

Insulator: PBT & glass fiber , rated UL94V-0

Contacts: Brass Gold plated

**CONTACT PLATING**

S=1u" gold on mating length, 100u" tin on solder tails base nickel=40u"

G=gold flash

A=5u" gold(selective)

B=10u" gold(selective)

C=15u" gold(selective)

D=30u" gold(selective)

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE


SIZE A4

PPOJECTION

X. ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ±



**ORDER INFORMATION**

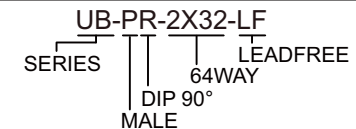

DESCRIPTION: DIN 41612 (DUAL ROW) MALE 64PIN

**煜倫股份有限公司**

www.morethanall.com