


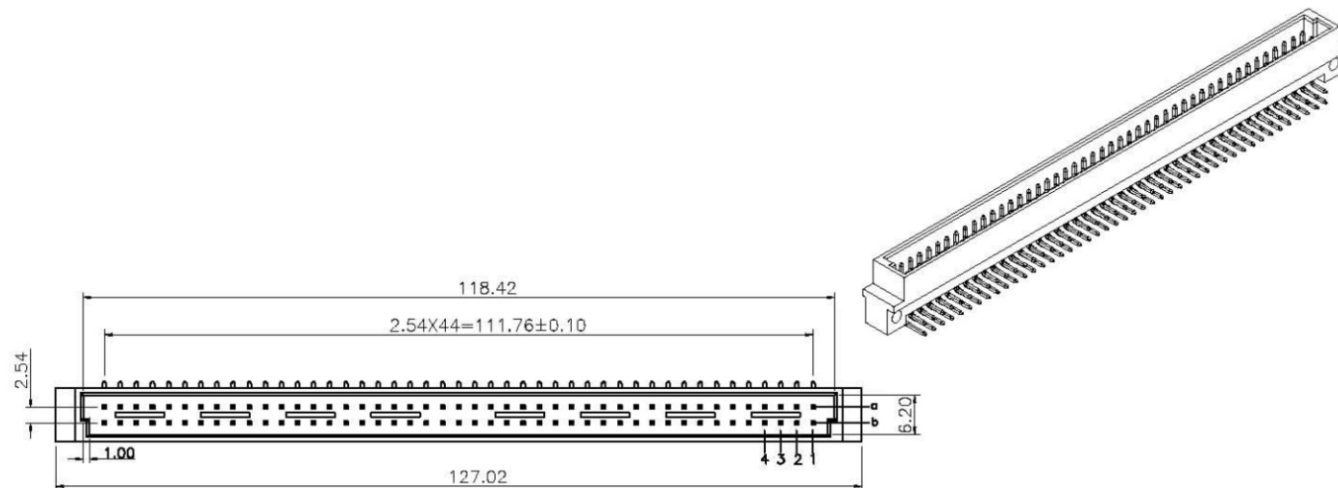

Material:

Housing: 30%Glass Filled PBT UL94V-0.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 AMP.



Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 30m Ω max. at DC 100mA.

Operating Temperature: -55°C~+105°C .

***RoHS Compliant**

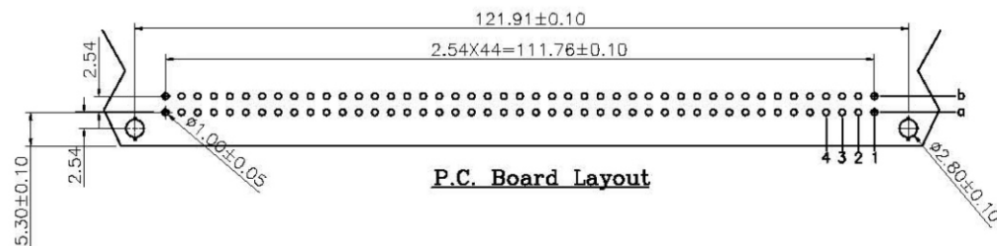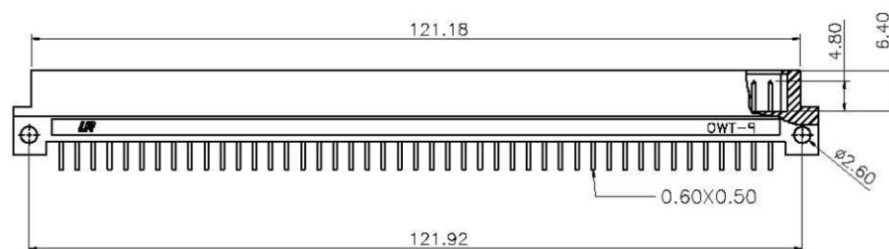

P.C. Board Layout

照片框

RoHS Compliant

TOLERANCES ARE

X, $\pm$
X, $\pm$
.XX $\pm$
.XXX $\pm$
ANG $\pm$

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

ORDER INFORMATION

UB-PR-2X45-LF
SERIES | LEADFREE
90 WAY
DIP 90°
MALE

DESCRIPTION:

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com