

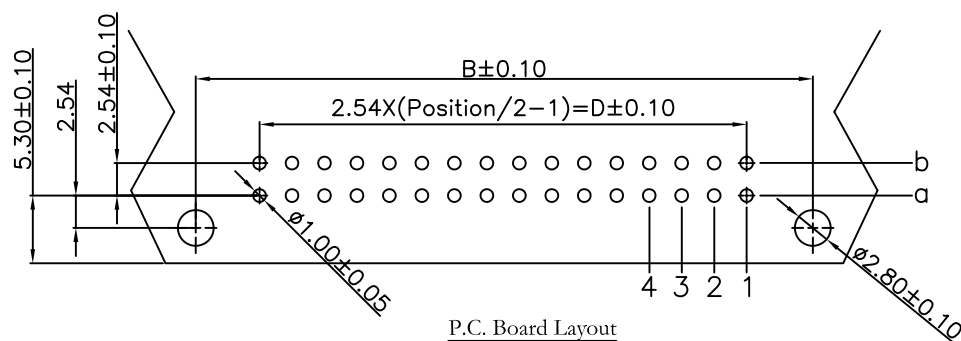
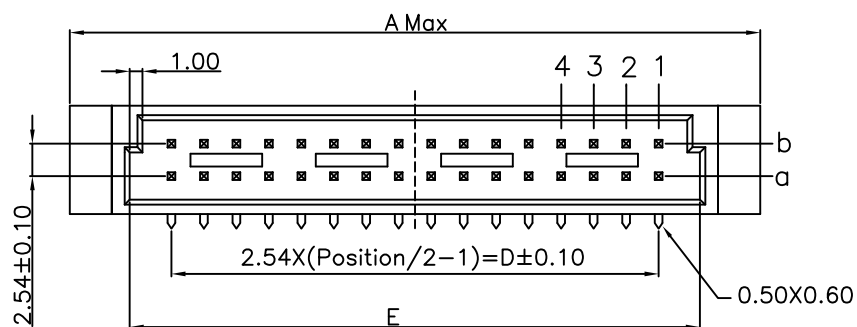


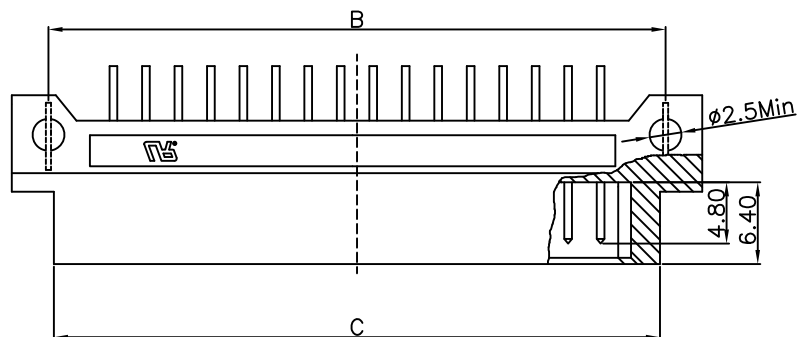

P.C. Board Layout



Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.





Insulator Resistance: 1000MΩ Min. at DC 500V.

Contact Resistance: 20mΩ Max. at DC 100mA.

Operating Temperature: -55°C ~+125°C .

***RoHS Compliant**

Dimension					
Position	A	B	C	D	E
44/22	69.24	63.50	62.64	53.34	59.95
32/16	54.00	48.26	47.40	38.10	44.60

UB-PR-2X22		a b	44	2.54mm
UB-PR-2X16		a b	32	
UB-PR-1X22		a -	22	
UB-PR-1X16		a -	16	

P/N	Contact Arrange	Rows with Contacts	Position	Pitch
-----	-----------------	--------------------	----------	-------

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ± 0.50

.X ± 0.25

.XX ± 0.15

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UB-PR-xXxx-LF
SERIES | LEADFREE
2X22:44WAY
1X16:16WAY
DIP 90°
MALE

DESCRIPTION: