
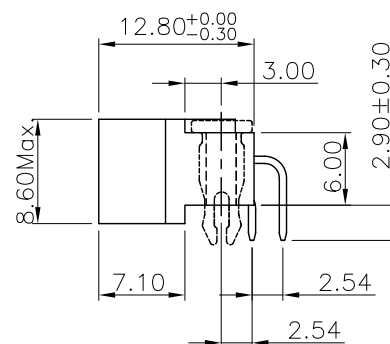
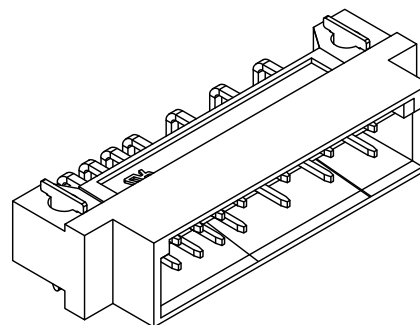


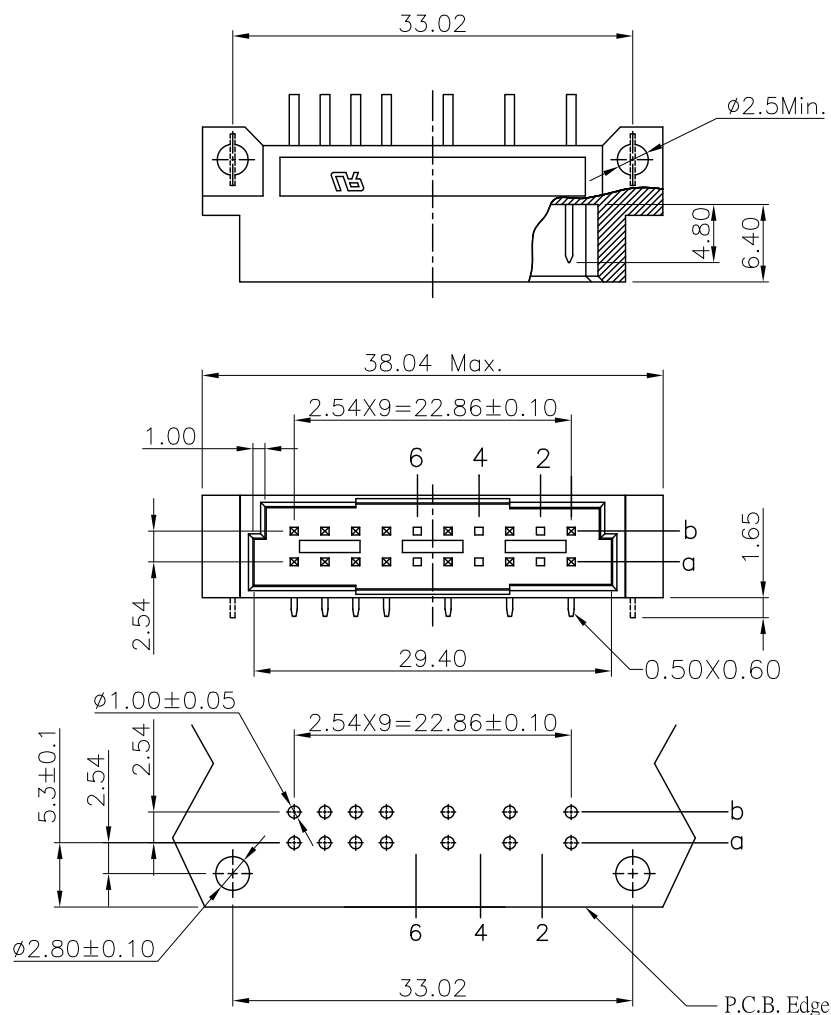

Material:

Housing: PBT, UL94V-0.

Contacts: Brass.

Lock: Copper Alloy.

Electrical Characteristics:

Current Rating: 2 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulation Resistance: 1000M Ω min. at DC 500V.

Contact Resistance: 20m Ω max. at DC 100mA.

Operating Temperature: -55°C ~ +125°C.

***RoHS Compliant**

NOTE:

a2,b2,a4,b4,a6,b6 Without Contact.

P.C.Board Layout

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X $\pm$ 0.50

CHECKED BY GENIUS

X $\pm$ 0.25

UNIT / mm

SCALE 1 : 1

.XX $\pm$ 0.15

DATE

.XXX $\pm$

ANG $\pm$

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

UB-PRx-2X10E246-LF
 SERIES | | | LEADFREE
 | | | EMPTY 2.4.6 ROW
 | | | 20 WAY
 | | | BLANK:NON CLIP
 MALE | Z:CLIP
 | DIP 90°

DESCRIPTION:

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com