


△ SPECIFICATION
 MATERIAL
 Insulator: PBT, rated UL94V-0
 Contacts: Phosphor Bronze
 Rivet,Boardlock: Copper alloy
 CONTACT PLATING
 Underplate: 50m Nickel
 Contact area: 1m~30m Selective gold
 Solder tails area: 100m Tin/Lead
 ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 1 Amps max.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C

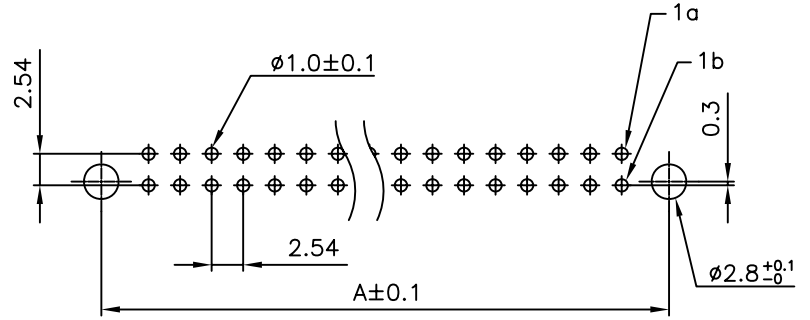

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
 TOLERANCES: ±0.10mm

NOTE:

PART NO.	A	B	C
UB-SD-2X32	90.00	95	85
UB-SD-2X16	50.00	54	44

MORETHANALL
 CONNECTORS
 ASSEMBLIES

PART NO. UB-SD-2Xxx		CHECKED BY CY		TOLERANCES ARE		DESCRIPTION: DIN 41612 (DUAL ROW) FEMALE 64PIN & 32PIN				
DWG NO. UB-SD-2Xxx		DRAWING BY		.X ± 0.3 .XX ± 0.2 .XXX AWG		AREA				
FILE NO.		PROJECTION				REVISIONS		HK		DATE
UNIT / mm		SCALE 1:1								

煜倫股份有限公司