

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ±0.10mm

▲ SPECIFICATION
 MATERIAL
 Insulator: PBT, rated UL94V-0
 Contacts: Brass
 Shell: Steel
 Rivet, Boardlock: Copper alloy
 CONTACT PLATING
 Underplate: 50m² Nickel
 Contact area: 1m²~30m² Selective gold
 Solder tails area: 100m² Tin/Lead
 ELECTRICAL
 Operation voltage: 250 VAC max.
 Current rating: 1 Amps max.
 Contact resistance: 20 mohms max.
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC / minute
 Operating temperature: -55°C TO +125°C


RoHS Compliant

TOLERANCES ARE


MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司
 www.morethanall.com

DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±



ORDER INFORMATION

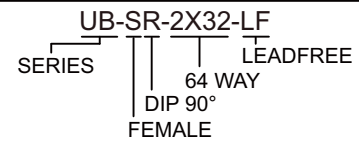

DESCRIPTION: DIN 41612 (DUAL ROW) FEMALE 64PIN