
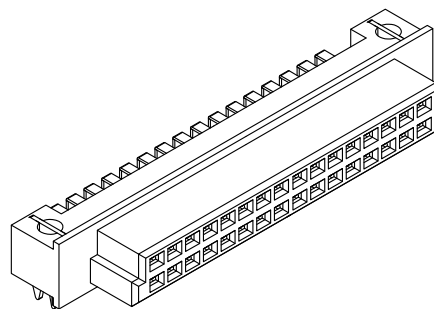


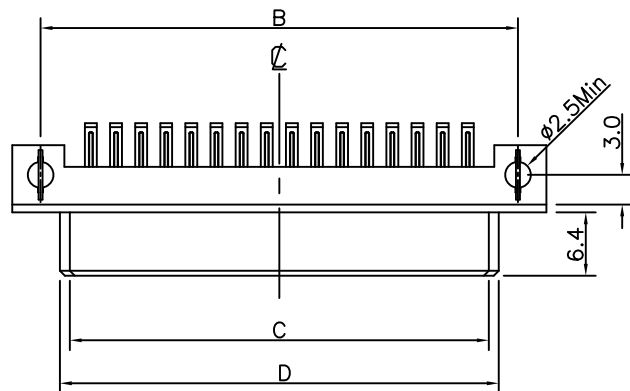



# Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.  
Contacts: Copper Alloy.


# Electrical Characteristics:

Current Rating: 2 AMP.  
Dielectric Withstanding Voltage: AC1000V For 1 minute.  
Insulator Resistance: 1000M $\Omega$  min. at DC 500V.  
Contact Resistance: 20m $\Omega$  max. at DC 100mA.  
Operating Temperature: -55°C ~+125°C.

**\*RoHS Compliant**

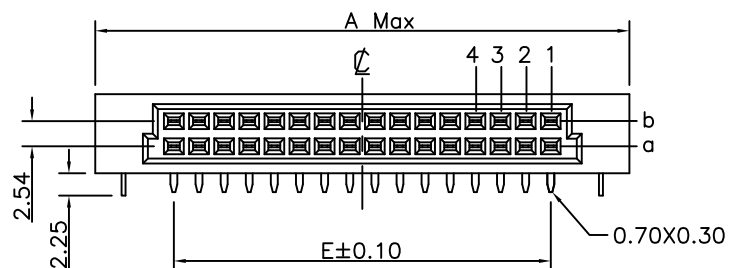

| P/N         | A     | B     | C     | D     | E     |
|-------------|-------|-------|-------|-------|-------|
| UB-SRZ-2X16 | 54.0  | 48.26 | 42.36 | 44.36 | 38.1  |
| UB-SRZ-2X10 | 38.76 | 33.0  | 27.12 | 29.12 | 22.86 |

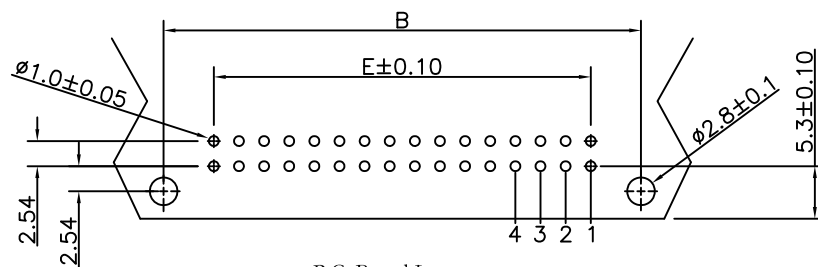

P.C. Board Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X.  $\pm$  0.50

.X  $\pm$  0.25

.XX  $\pm$  0.15

.XXX  $\pm$

ANG  $\pm$

PPOJECTION

照片框

# ORDER INFORMATION

UB-SRZ-2Xxx-LF  
SERIES LEADFREE  
2X10:20WAY  
2X16:32WAY  
FEMALE CLIP  
DIP 90°

DESCRIPTION: