



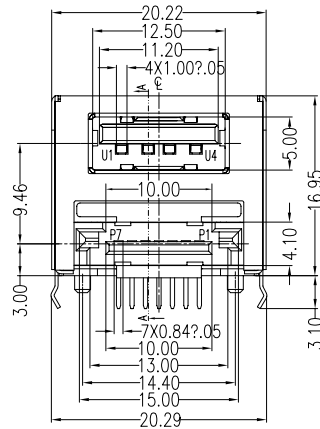


3D Drawing

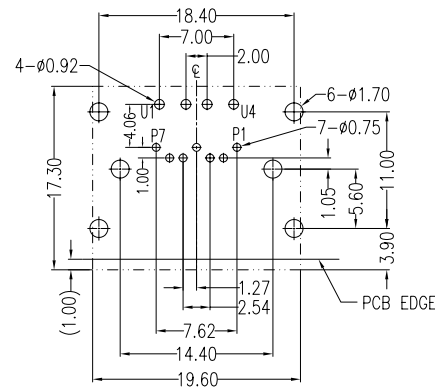

SECT A-A



P.C.B Layout t=1.60mm

Top View

Unit:mm

Standard	Dim "A"
UBESA-AR-4A07	3.10

NOTES:

*e SATA Material

Housing : Nylon 46,UL 94-0 Rated
Contact : Brass,Gold plating over Nickel on contact area; Tin Plating on Solder Tail.

Shell : SUS304

*e SATA Electrical Specification

Operation Voltage:100 VAC max.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30mOHM Max
Insulation Resistance: 1000M OHM MIN
Dielectric Withstanding Voltage:500VAC.

*USB Material

Housing : Nylon 66,UL 94-0 Rated
Retainer : Nylon 66,UL 94-0 Rated
Contact : Phosphor bronze,Gold plating over Nickel on contact area; Tin Plating on Solder Tail.

Shell(Inside): SUS304

Shell(Outside): Brass,Nickel plating

*USB Electrical Specification

Rated Voltage and Current : 1.5A at 250V AC min;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min At 500V DC.
Dielectric Withstanding Voltage: 500 V AC For 1 minute.

*Environmental

Operating Temperature : -55°C to +125°C.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBESA-AR-4A07-LF

SERIES

LEADFREE

4 PIN A TYPE TO 07 PIN

DIP 90°
FEMALE TO MALE

DESCRIPTION: USB+eSATA Plug DIP Type