


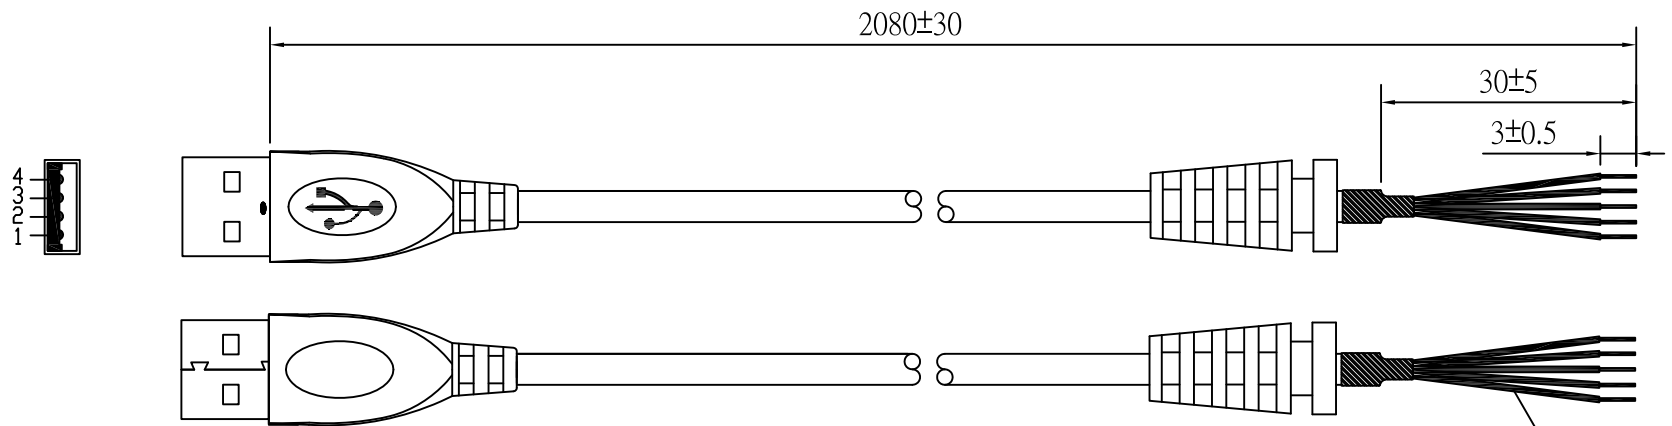


P1  
USB A M

YS121462

包地線熱縮管上點白點

P2  
S/T



## WIRING DIAGRAM

| P1    |   | P2  |       |
|-------|---|-----|-------|
| RED   | 1 | S/T | RED   |
| WHITE | 2 | S/T | WHITE |
| GREEN | 3 | S/T | GREEN |
| BLACK | 4 | S/T | BLACK |
| DRAIN | D | S/T | DRAIN |

| 2   | CONNECTOR | 1    | SET   | USB A TYPE MALE G/F #WHITE                                                  |
|-----|-----------|------|-------|-----------------------------------------------------------------------------|
| 1   | CABLE     | 2100 | mm    | UL2725 28AWG*1P(WHITE, GREEN)+24AWG*2C(RED, BLACK)+AEB OD:4.5±0.15mm #BLACK |
| NO. | PART NO.  | Q'TY | UNITS | DESCRIPTION                                                                 |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm


SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±



## ORDER INFORMATION

UBX1-4A1X2428-M2M08-LF

SERIES

SR

24/28AWG

MALE

4 PIN A TYPE

LEADFREE

2080mm

DESCRIPTION: USB A MALE L:2.08M BLACK