


模号:YXM-035

P1

P2

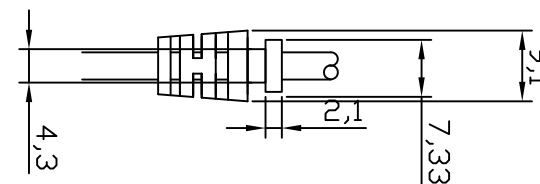

## WIRING DIAGRAM

P1

P2

- |   |       |      |
|---|-------|------|
| 1 | RED   | OPEN |
| 2 | WHITE | OPEN |
| 3 | GREEN | OPEN |
| 4 | BLACK | OPEN |

SHELL ———— OPEN

|     |          |      |       |                                                                                                       |
|-----|----------|------|-------|-------------------------------------------------------------------------------------------------------|
| 4   | SCREW    | 2    | PCS   | 4-40 JACKSCREW                                                                                        |
| 3   | PVC      | 15   | G     | 45P #BK PVC                                                                                           |
| 2   | CONN.    | 1    | SET   | USB "A" TYPE MALE USB RE2.0 WHITE                                                                     |
| 1   | CABLE    | 182  | mm    | UL2725 28AWG*1P+28AWG*2C+AEB USB2.0<br>COLOR:#BK OD:3.5±0.15mm半雾面<br>(ALL VENDER FOR UL2725 APPROVED) |
| NO. | PART NO. | Q'TY | UNITS | DESCRIPTION                                                                                           |

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION

照片框

## ORDER INFORMATION

UBX1-4A1X2VTS28-M6F-LF

SERIES

4 PIN A TYPE

SR

2.0 REV

28AWG

MALE

THUMB SCREW

LEADFREE

1800mm

DESCRIPTION: USB A M TO OPEN L: 72"