



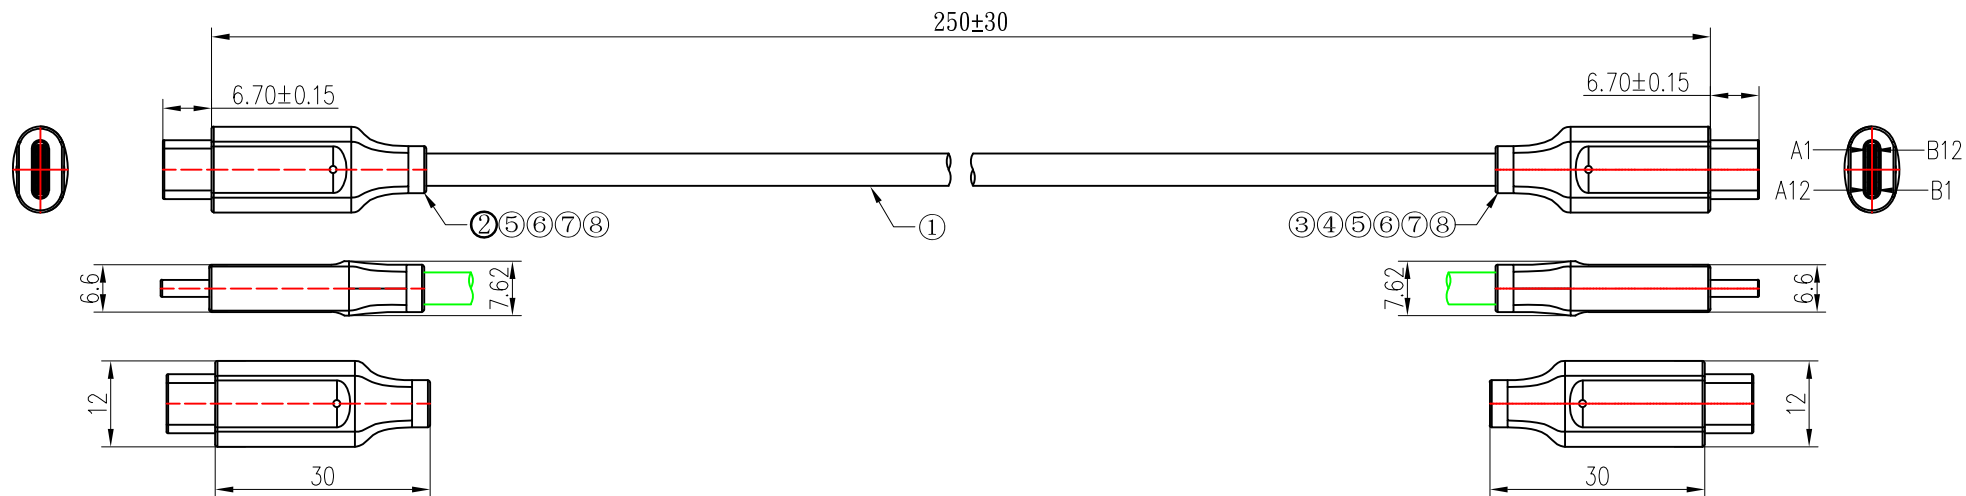

NOTES:
1: IC: 5A 100W 20GBPS

⑨	WIRE TIE: BLACK	2PCS
⑧	OUTMOLDED: PVC 45P BLACK	*/KG
⑦	INTERMOLDED: LDPE M 1850A	*/KG
⑥	High-temperature adhesive: 12mm	2PCS
⑤	Copper foil: 22*45mm; 18*35mm	2PCS
④	tinplate: TYPE-3.1 NI PLATED	1PCS
③	CONN:TYPE-C3.1 MALE G/F INSULATION BLACK SHELL NI PLATED+Capacitance 10nf	1SET
②	CONN:TYPE-C MALE G/F INSULATION BLACK SHELL NI PLATED PCB+Capacitance 10nf	1SET
①	CABLE: USB3.2 (32AWG*1P+D+AL+MY)*4P+32AWG*1P+32AWG*4C+24AWG*2C+AEB (16/8/0.08TC) JACKET: PVC BLACK OD:4.5	1PCS
NO.	ITEM	Q' TY

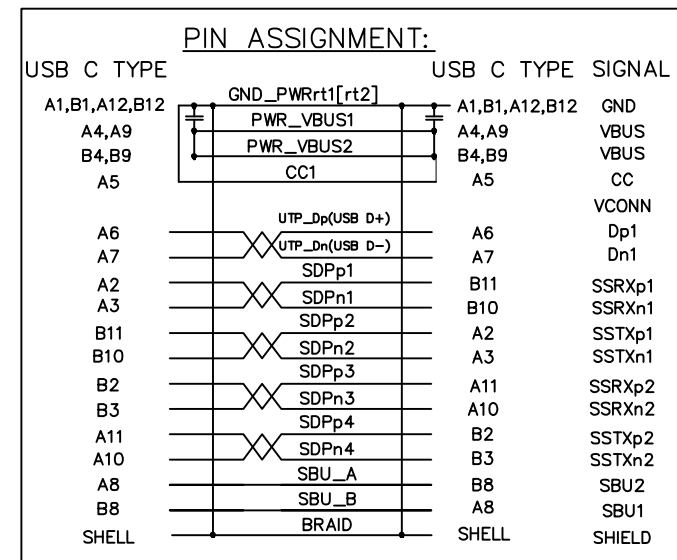

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ± 1.00
.X ± 0.50
.XX ± 0.10
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-24C162432-M25C-LF

SERIES

24P16C

24/32 AWG

250mm

MALE TO MALE

LEADFREE

250mm

MALE TO MALE

24/32 AWG

DESCRIPTION: