


PIN ASSINGMENT

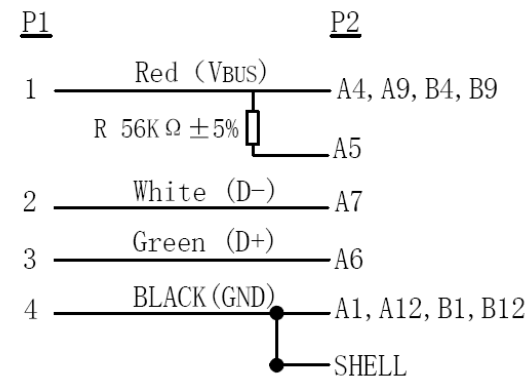

一、Electrical charactor:

- (1) 100% Open & Short Testing
- (2) Withstanding Voltage:DC 300V, 0.01s
- (3) Insulation impedance: $\geq 10M \Omega$
- (4) Conduction impedance: $\leq 0.4 \Omega$

二、Rated voltage:5V, Current:3A

Note :The position marked with "▼" is the key control dimension

⑥	Molded	OUTER MOLD:80A TPE. COLOR:WHITE	N/A	Kg	
⑤	Molded	INNER MOLD: PP, COLOR:TRANSPARENT	N/A	Kg	
④	Molded	INNER MOLD: LD-PE, COLOR:TRANSPARENT	N/A	Kg	
③	Conn	TYPE C 2.0 C/M, Pin G/F, Black Insulation, SHELL Nickel Plated, with 56K Ω Resistance.	1	PC	
②	Conn	USB 2.0 A/M, Pin G/F, White Insulation, SHELL Nickel Plated, Short TYPE, Solder TYPE.	1	PC	
①	Cable	NON UL 28AWG (19/0.08TC+250D)*IP+24AWG (41/0.08TC+250D)*2C+TPE JACKET, White, OD:3.0+/-0.15mm, Surface Dentition .HF.	0.98	M	
ITEM	PART No.	NAME	DESCRIPTION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PJECTION



ORDER INFORMATION

UBX2-24C4A2428-M1M-LF

SERIES

LEADFREE
1000mm
MALE TO MALE
24.28 AWG
24C TO 4A TYPE

DESCRIPTION:

煜倫股份有限公司

www.morethanall.com