


Pin Assignment

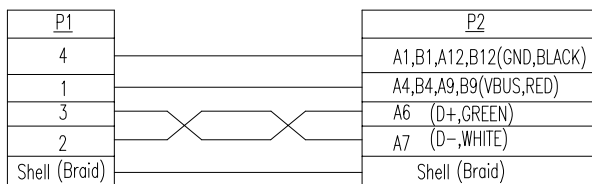

BACK SIDE

Notes:

- ELECTRICAL TEST:
(1).100% OPEN SHORT AND MIS-WIRE TEST.
(2).Contact Resistance: 5ΩMAX.
(3).Insulation Resistance: DC300V 0.01S 10MΩ Min

5	Pre-Mold	PE	A/R	——
4	OverMold	PVC 45P Black	A/R	——
3	CONN2	USB 2.0 CM,Pin:G/F In: BLACK PCB(R 56kΩ/5.1KΩ)	1PCS	——
2	CONN1	USB 2.0 AM ,Pin:G/F Insulator: BLACK	1PCS	——
1	CABLE	UL2725 28#x1P+28#x2C+AEB(AL) JACKET: PVC Black OD:3.5mm	480MM	——
ITEM	DESCRIPTION	SPECIFICATION	Q'TY	MOLD NO.

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

PJECTION

照片框

ORDER INFORMATION

UBX2-24C4A28-M50C-LF

SERIES

LEADFREE

500mm

MALE TO MALE

28 AWG

24 PIN C TYPE TO 4 PIN A TYPE

DESCRIPTION: USB 2.0 AM TO CM L=500mm(鍍)