

Conn.1 USB3.0 AF


Conn.2 TYPE C MALE

Electronic Test:

包装方式：单PCS包装.

- 1.100% Test,(Open,Short,Miss Wire)
- 2.Contact Resistance: 2 ohm max
- 3.Insulation Resistance: 10M ohm min
- 4.Hi-pot: 300V DC/10ms

Pin Assignment

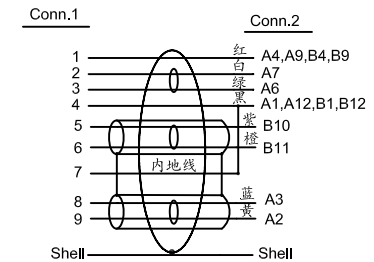

PART LIST: 本产品均符合“ROHS”环保标准，用的材料均为相当品。

E	R81-55001	Mold: 55P PVC Color: Black	8/1000	KG
D	R82-80001	Mold: LDPE	5/1000	KG
C	R21-24102-1	TYPE C-3.0V 铁壳镀镍黑胶芯,带PCB板	1	PCS
B	R21-09107-1	USB 3.0 AF 镀镍蓝胶芯 带铁护套.	1	PCS
A	R11-09048	CABLE:(28AWG*1P+D+AL+MY)*2+28AWG*1P+28AWG*2C +F+AL+D7/0.12BCCS+BD48/0.12AM OD=3.8mm±0.15 Black	L	M
NO	P/N(料号)	DESCRIPTION(描述)	QTY (数量)	UNIT (单位)

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX2-24C9A28-E15C-LF

SERIES

LEADFREE

150mm

MALE TO FEMALE

28 AWG

24 PIN C TYPE TO 9 PIN A TYPE

DESCRIPTION: USB3.0 AF TO USB3.1 TYPE C