


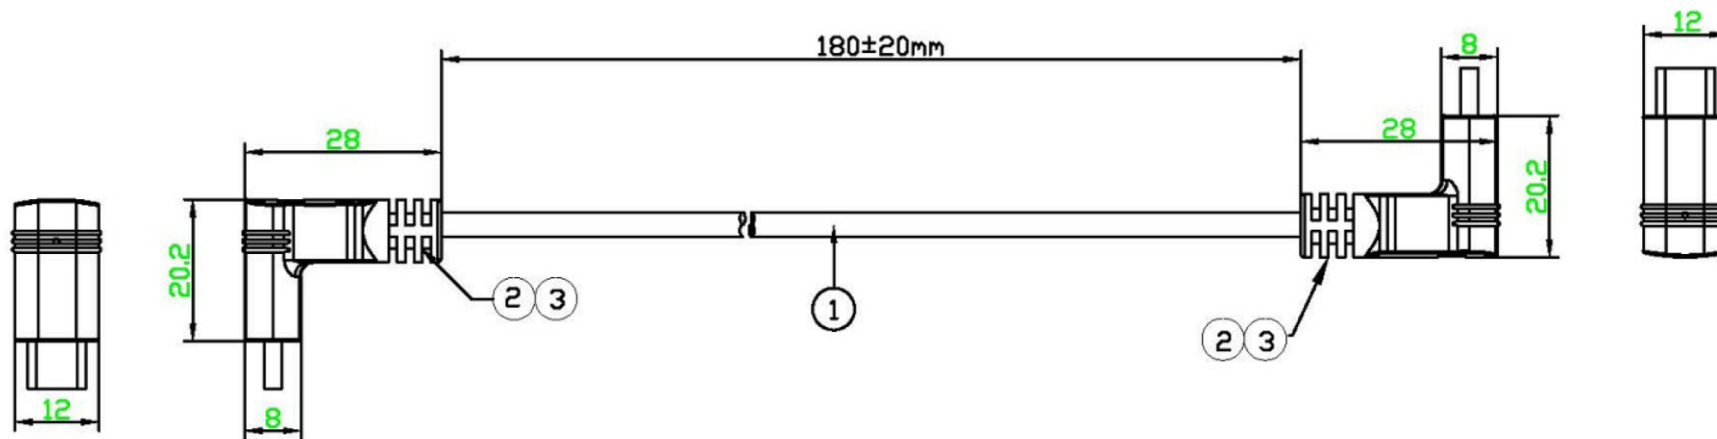

ELECTRICAL PROPERTIES:

- 1 Contact Resistance: 3 ohm MAX
- 2 Insulation Resistance: 5Mega ohm MIN
- 3 Hi-Pot: 300V DC/10ms

③	PVC 45P BLACK	AR
②	USB3.1 Type-C Male ,CONTACT: G/F".SHELL: GOLD-PLATED	2
①	CABLE:(1/0.2TS*1P+AI)*4+1/0.2TS*1P+1/0.2*4C+11/0.16*2C +AL+B,OD4.5mm,colour:Black 240MM	1
NO.	DESCRIPTION	Q'TY

WIRE MAP	
P1	P2
A1,B1,A12,B12+SHELL	A1,B1,A12,B12+SHELL
A4,B4,A9,B9	A4,B4,A9,B9
A2	B11
A3	B10
A5	A5
A6	A6
A7	A7
A8	B8
A10	B3
A11	B2
B2	A11
B3	A10
B8	A8
B10	A3
B11	A2

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX2-24CRU243234-M18C-LF

SERIES

24 WAY C TYPE

24C
RA/UP

32+34 AWG

180mm

LEADFREE

MALE TO MALE

DESCRIPTION: