

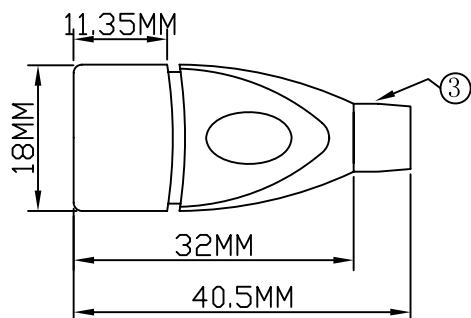


P1



300±10MM


P2



PIN OUTS

P1	P2
1	1 RED (红)
2	2 WHITE (白)
3	3 GREEN (绿)
4	4 BLACK (黑)
SHELL	SHELL (编织)

包装方式: 单PCS理线包装.
50PCS一大袋.

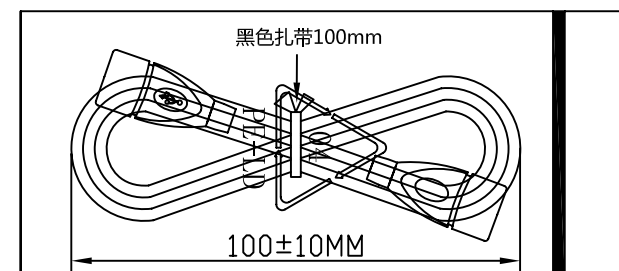

ELECTRONIC TEST CONDITION:
100% OPEN SHORT & MISWIRE TEST.
CONDCTIVE RESISTANCE: 2 Ω /MAX
INSULATION RESISTANCE: 20M Ω /MIN. AT DC 300V

3	黑色PVC 45P外模料	1	PCS
2	USB AF:GOLD 1U" CONNECTOR, NICKEL PLATED SHELL, PLASTLC:WHITE	2	PCS
1	CABLE:UL2725 28AWG*1P+28*2C+ABE OD:3.5MM COLOR BLACK L=300MM	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

UBX2-4A4A28-F30C-LF

SERIES

LEADFREE

300mm

FEMALE TO FEMALE

28 AWG

4 PIN TO 4 PIN A TYPE

DESCRIPTION: USB AF TO AF双头全包 CABLE BLACK L=300MM