
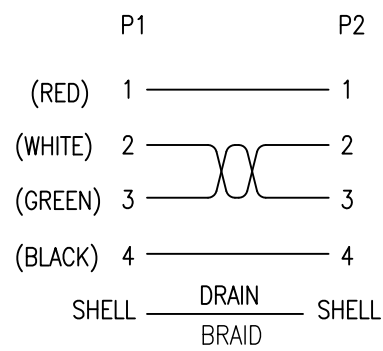


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

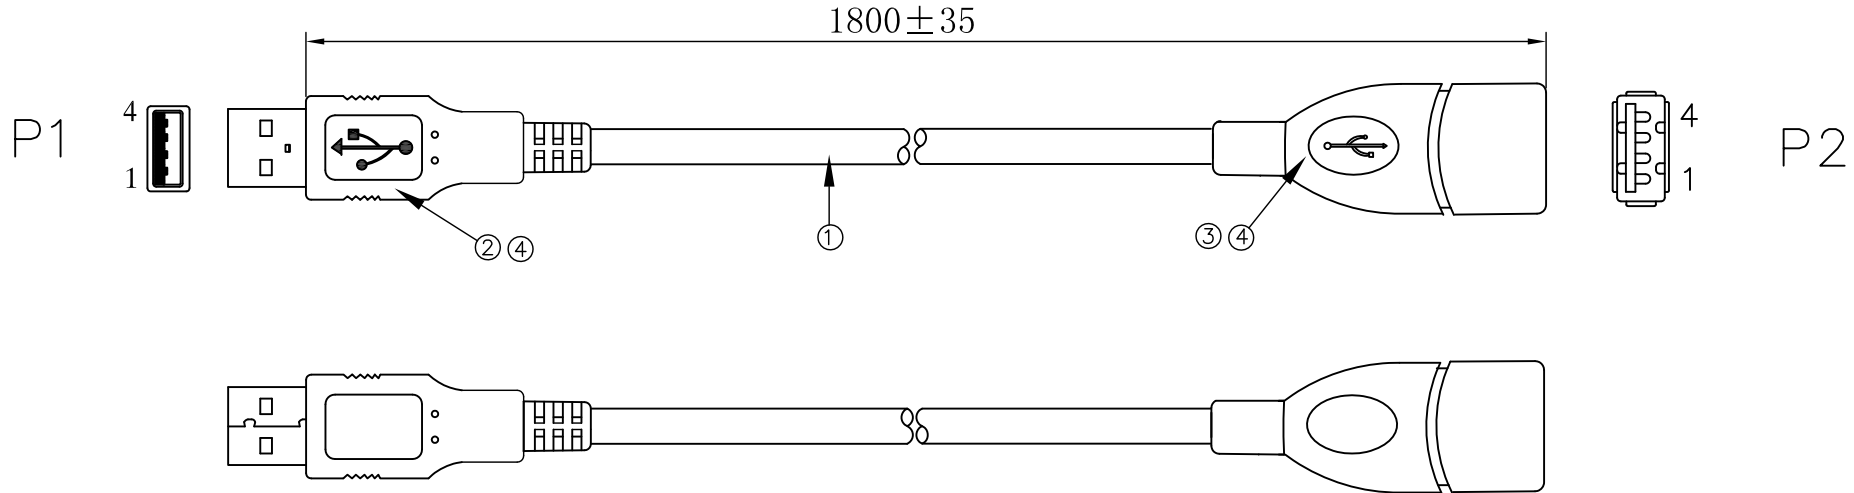

ELECTRICAL PROPERTIES:

1. 100% Open Short Mis-Wire Test
2. Contact Resistance: 2 ohm max
3. Insulation Resistance: 10mega ohm min
4. Hipot test: DC 100V 10ms

UBX2-4A4A2V-E1M8-LF  
LEADFREE  
RoHS Compliant

④	PVC 45P BLACK (ROHS)	12G
③	USB A/F G/F (ROHS)	1PCS
②	USB A/M G/F (ROHS)	1PCS
①	UL2725 #28/1P+#28/2C+AEB(AL) OD:3.5 BLACK (ROHS)	1PCS
NO.	DESCRIPTION	Q'TY

	PART NO. UBX2-4A4A2V-E1M8		TOLERANCES ARE .X ± .XX ± .XXX ± AWG	DESCRIPTION: USB AM/AF L=180cm				
	DWG NO. UBX2-4A4A2V-E1M8							CHECKED BY CY
焯倫股份有限公司	FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE
	UNIT / mm	SCALE 1:1	PROJECTION					