


UBX2-4A4A2V-E3M-LF
LEADFREE

RoHS Compliant

WIRING DIAGRAM

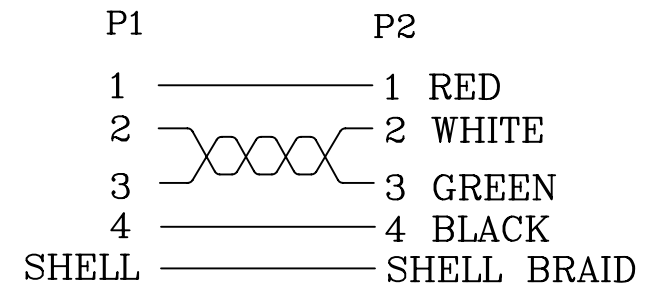

NO.	PART NO.	Q'TY	UNITS	DESCRIPTION
5	PVC	10	G	#BLAK 45P PVC
4	PE	2	G	LD-PE
3	CONNECTOR	1	SET	USB A TYPE MALE G/F WHITE
2	CONNECTOR	1	SET	USB A TYPE FEMALE G/F WHITE (全包)
1	CABLE	360	mm	UL2725 28AWG*1P(WHITE, GREEN)+28AWG*2C (RED, BLACK)+AEB(4/16) OD:3.5±0.15mm BLACK (VENDER FOR USB2.0 APPROVED)



PART NO. UBX2-4A4A2V-E3M		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG		DESCRIPTION: USB A M/F L: 5M BLACK				
DWG NO. UBX2-4A4A2V-E3M		DRAWING BY								
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE			
UNIT / mm	SCALE 1:1									

煜倫股份有限公司