
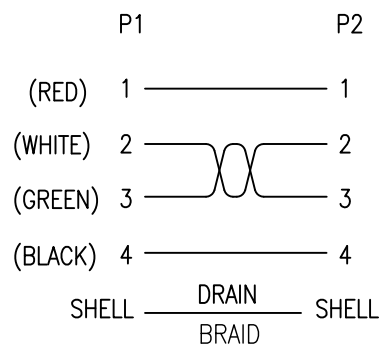


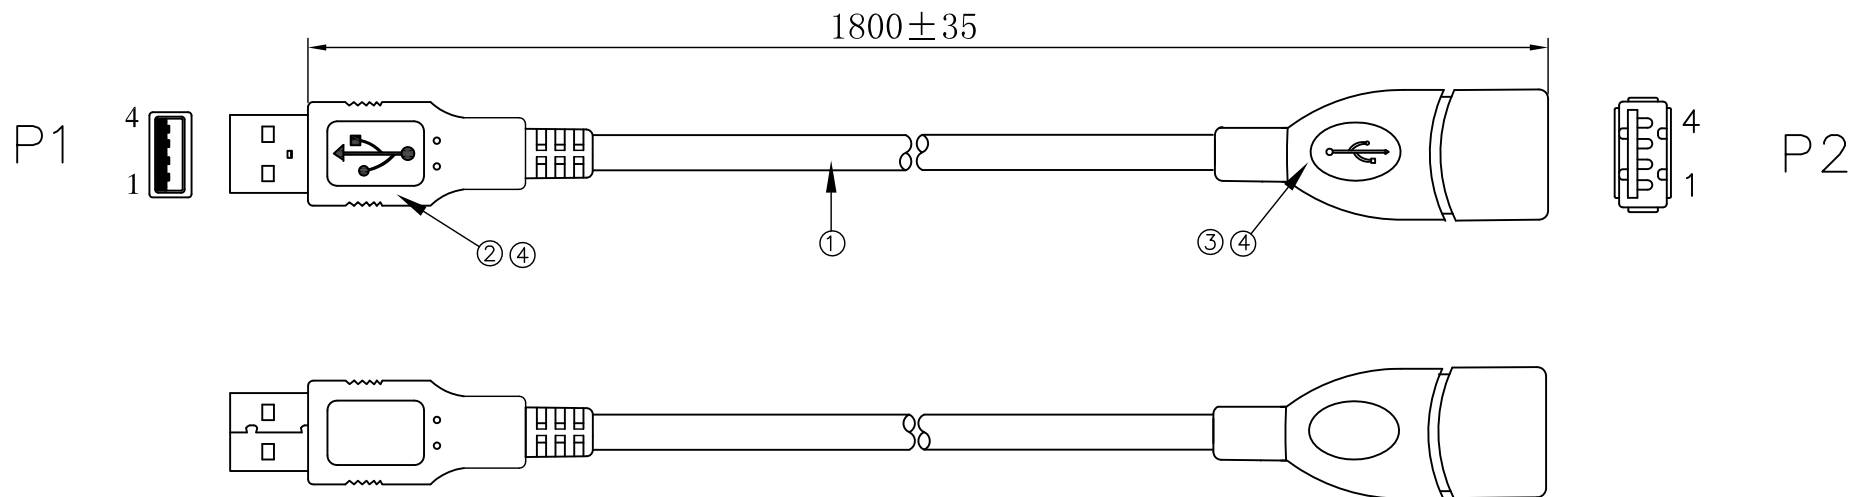

ELECTRICAL PROPERTIES:

- 100% Open Short Mis -Wire Test
- Contact Resistance: 2 ohm max
- Insulation Resistance: 10mega ohm min
- Hipot test: DC 100V 10ms

④	PVC 45P BLACK (ROHS)	12G
③	USB A/F G/F (ROHS)	1PCS
②	USB A/M G/F (ROHS)	1PCS
①	UL2725 #28/1P+#28/2C+AEB(AL) OD:3.5 BLACK (ROHS)	1PCS
NO.	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4A2V28-E1M8-LF

SERIES

LEADFREE

1800mm

MALE TO FEMALE

28 AWG

2.0 REV

4 PIN TO 4 PIN A TYPE

DESCRIPTION: USB AM/AF L=180cm