



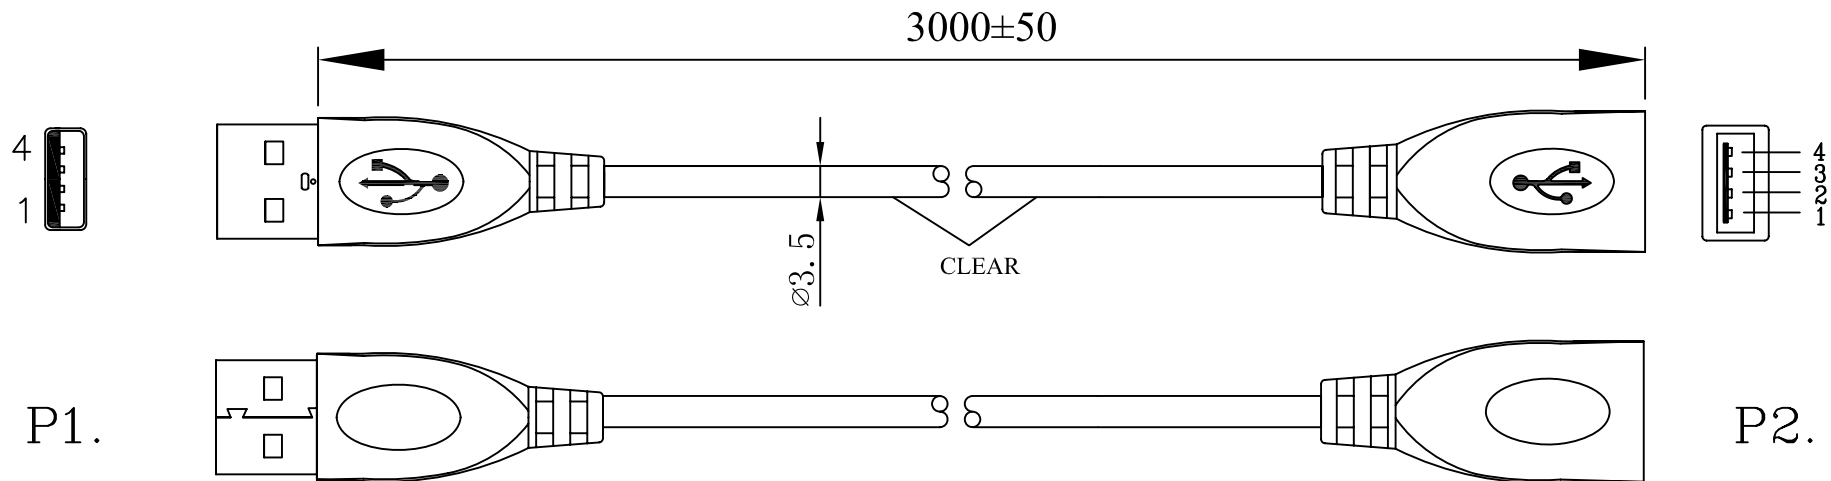

WIRING DIAGRAM

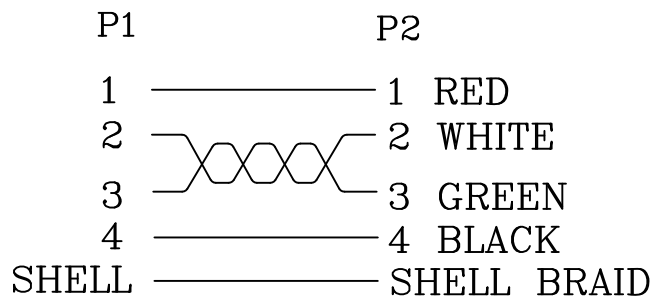

NO.	PART NO.	Q'TY	UNITS	DESCRIPTION
5	PVC	10	G	#BLAK 45P PVC
4	PE	2	G	LD-PE
3	CONNECTOR	1	SET	USB A TYPE MALE G/F WHITE
2	CONNECTOR	1	SET	USB A TYPE FEMALE G/F WHITE (全包)
1	CABLE	360	mm	UL2725 28AWG*1P(WHITE, GREEN)+28AWG*2C (RED, BLACK)+AEB(4/16) OD:3.5±0.15mm BLACK (VENDER FOR USB2.0 APPROVED)

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4A2V28-E3M-LF

SERIES

LEADFREE

3000mm

MALE TO FEMALE

28 AWG

2.0 REV

4 PIN TO 4 PIN A TYPE

DESCRIPTION: USB A M/F L: 5M BLACK