



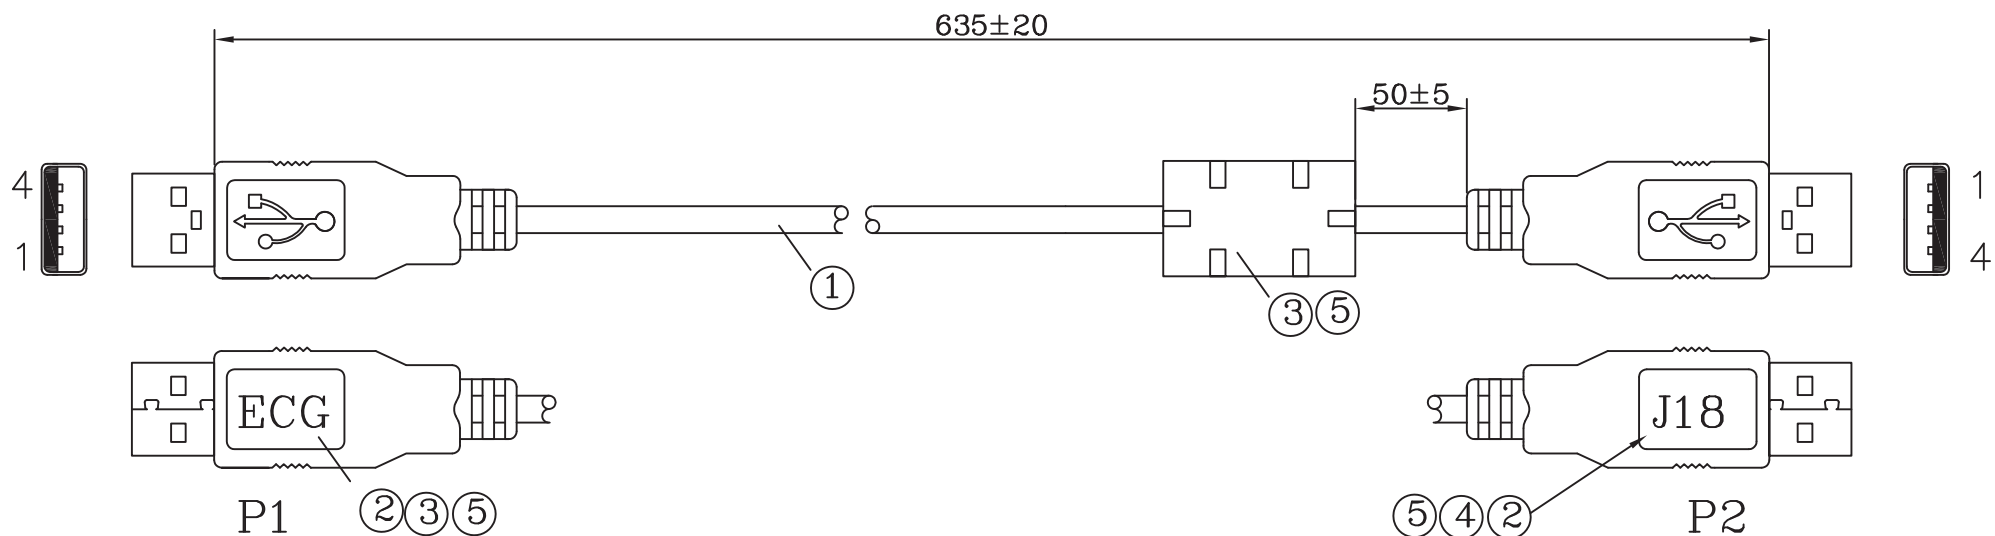

WIRING DIAGRAM

P1

P2

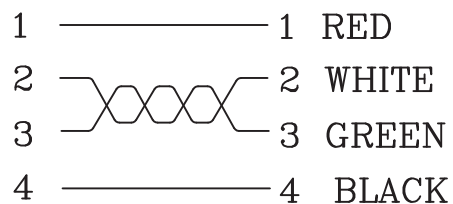

SHELL BRAID+DRAIN SHELL

5	PVC	14	SET	45P PVC CLR-002
4	LABLE	1	SET	J18(10*5)
3	LABLE	1	SET	ECG(10*5)
3	CORE	1	SET	B15 RH 9.8*25*5.2MM
2	CONNECTOR	2	SET	USB A TYPE MALE 30U" #WHITE USB 2.0
1	CABLE	200	mm	UL2725 28AWG*1P+24#*2C+AB65% OD:4.5MM USB 2.0 CLR-002
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4A2VFC-M63C5-LF

SERIES

LEADFREE

635mm

MALE TO MALE

FERRITE CORE

2.0 REV

4 PIN A TYPE TO 4 PIN B TYPE

DESCRIPTION: USB A M/M L: 635mm