


1200mm ± 20mm

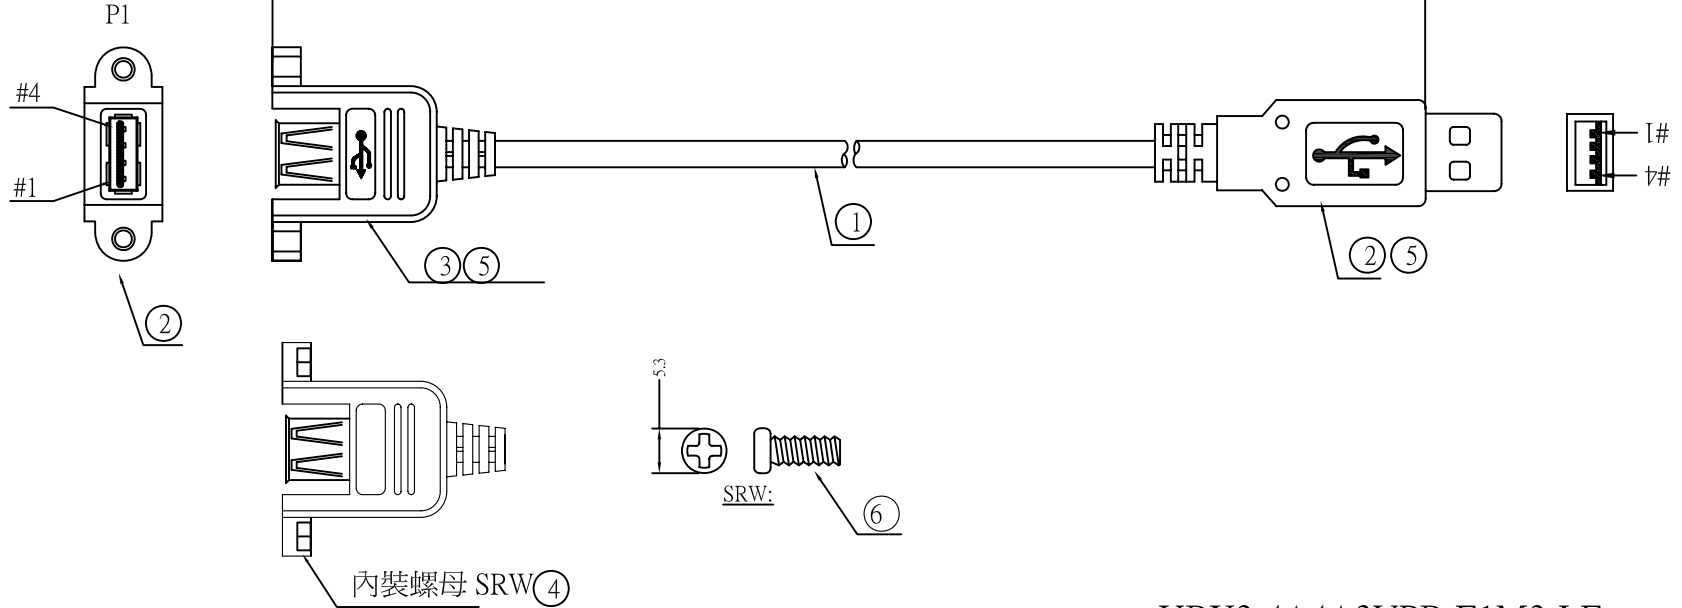

UBX2-4A4A2VPB-E1M2-LF
LEADFREE

RoHS Compliant

PIN ASSIGNMENT

USB AM	USB AF
1 — RED	1
2 — WHITE	2
3 — GREEN	3
4 — BLACK	4
G	G

- 1 2.0版 UL2725 28AWG/1P+24AWG/2C+AB+E OD=4.6 BLACK
- 2 USB AM 焊線頭
- 3 USB AF 焊線頭
- 4 NUTS:H4.75*3.0MM<4-40#>
- 5 PVC45% (黑色)
- 6 SRW:5.3*8.9MM<全牙>



PART NO. UBX2-4A4A2VPB-E1M2		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION: 2.0 USB A M/ F L:1.2M BLACK
DWG NO. UBX2-4A4A2VPB-E1M2		DRAWING BY			
FILE NO.		PROJECTION		AREA	REVISIONS
UNIT / mm	SCALE 1:1			HK	DATE

煜倫股份有限公司