
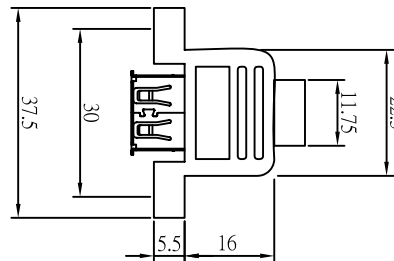


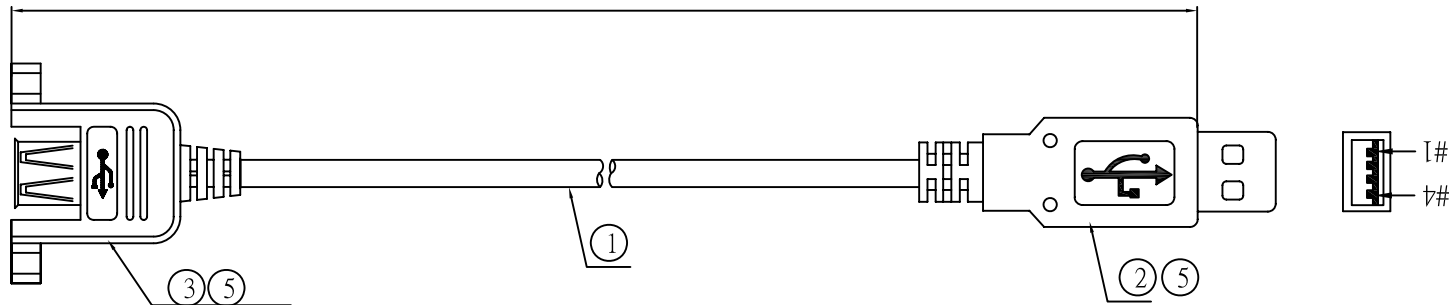


250mm ± 50mm

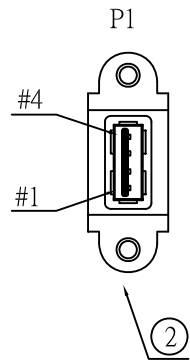

PIN ASSIGNMENT			
USB AM		USB AF	
1 — RED	—————	1	
2 — WHITE	XXXX	2	
3 — GREEN	—————	3	
4 — BLACK	—————	4	
G	—————	G	

RoHS Compliant

- 1 2.0版 UL2725 28AWG/1P+24AWG/2C+AB+E OD=4.6 BLACK
- 2 USB AM 焊線頭
- 3 USB AF 焊線頭
- 4 NUTS:H4.75*3.0MM<4-40#>
- 5 PVC45% (黑色)
- 6 SRW:5.3*8.9MM<全牙>

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. UBX2-4A4A2VPB-E25C

DWG NO. UBX2-4A4A2VPB-E25C

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG


DESCRIPTION: 2.0 USB A M/ F L:250mm BLACK

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE