


WIRING DIAGRAM



10	TUBE	1	SET	UL/CSA125° 300V Ø1.5*8MM #BK
9	PVC	15	G	45P PVC #GRAY
8	PE	4	G	PE(LD)
7	LABLE	1	SET	J223(10*5)
6	LABLE	1	SET	PRN(10*5)
5	CORE	1	SET	B15 RH 9.8*25*5.2
4	TAPE	1	SET	YELLOW TAPE 471
3	TAPE	2	SET	BLUE TAPE 471
2	CONNECTOR	1 1	SET	USB B TYPE MALE PIN G/F #WHITE USB A TYPE MALE PIN G/F #WHITE
1	CABLE	1220	mm	UL2725 28AWG*1P+24#*2C+AB65% OD:4.5MM #GRAY
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

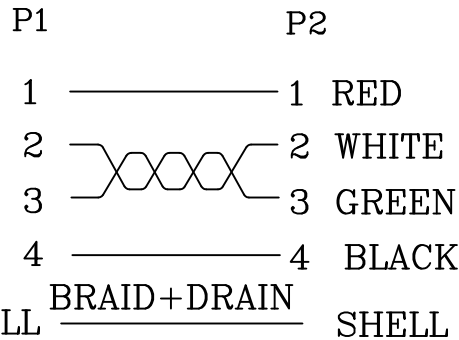

煜倫股份有限公司

PART NO. UBX2-4A4AFC-M1M21

DWG NO. UBX2-4A4AFC-M1M21

FILE NO.


UNIT / mm

CHECKED BY CY

DRAWING BY

SCALE 1:1

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: USB A M/M+CORE L: 800mm GRAY

AREA	REVISIONS	HK	DATE
------	-----------	----	------