

A	COLOR	B
1	BLACK	1
2	WHITE	2
3	RED	3
4	GREEN	4
SHELL	BRAID	SHELL

NOTES:

1. ALL DIMENSIONS ARE "mm".
2. THE PRODUCT MUST BE COMPLY WITH THE DIRECTIVE OF ROHS.

ELECTRICAL TESTING:

1. 100% OPEN/SHORT TEST
2. CONTACT RESISTANCE: 5mΩ
3. INSULATION RESISTANCE: 5MΩ Min

NO.	ITEM.	DESCRIPTION	Q'TY
1	WIRE:	UL2725 #28*1PR(WHITE, GREEN)+#24*2C(RED, BLACK)	1PCS
		+AEB JACKET:BLACK USB2.0 OD:4.5	
2	CONN:	USB A TYPE MALE 4P WHITE REV2.0 SHELL GOLD PLATED	1PCS
3	MOLDED:	PVC 45P BLACK Module Number:GH-016	8.5G
4	CONN:	USB B TYPE MALE 4P WHITE REV2.0 SHELL GOLD PLATED	1PCS
5	MOLDED:	PVC 45P BLACK Module Number:GH-215	8.5G
6	CORE:	K5A RH $\varnothing 12*20*\varnothing 5.6$	2PCS
7	MOLDED:	PVC 45P BLACK Module Number:GH-110	17G

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4A4B2428FC1-M1M5-LF

SERIES

LEADFREE

1500mm

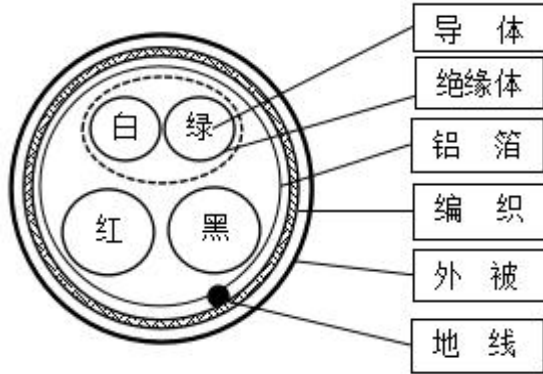
MALE TO MALE

FERRITE CORE

24&28 AWG

4 PIN A TYPE TO 4 PIN B TYPE

DESCRIPTION: CABLE ASS"Y

规格		UL 2725 28AWG*1P+24AWG*2C+DAB			结构示意图	
芯线数		28AWG*1P	24AWG*2C			
导体	构成	7/0.127±0.008mm	7/0.20±0.008mm			
	材质	镀锡铜	镀锡铜			
	绞向/绞距	S向	S向			
绝缘	材质	HDPE/3364	SR-PVC/32P			
	完成外径	0.85±0.05MM	1.05±0.05MM			
	颜色	白、绿	红、黑			
对绞	绞距/绞向	S向				
填充	材质	/				
总绞	绞向	S向				
地线	构成	7/0.16TS镀锡铜 S向				
包带	构成	银色铝箔 12mm*25U				
	方式/重叠率	纵包 导电面向外 重叠率25%				
编织	规格	16/4/0.10TS±0.008mm 镀锡铜			注意事项：	
	目数	5目				
外被	材质	PVC/65P 80℃ VW-1 黑色外被料 UL-BK01				
	完成外径	4.5±0.15 MM				
	表面处理	半雾面				
印字	E465682 兄 AWM STYLE 2725 80℃ 30V VW-1 28AWG/1P AND 24AWG/2C HIGH SPEED USB2.0 CABLE ROVD			印字轮编号	YZ-027	
				印字颜色	白色	
订单号码：		订单数量：			品名	UL 2725 28#*1P+24#*2C+DAB OD:4.5 PVC黑色

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

照片框

ORDER INFORMATION

UBX2-4A4B2428FC1-M1M5-LF

SERIES

LEADFREE

1500mm

MALE TO MALE

FERRITE CORE

24&28 AWG

4 PIN A TYPE TO 4 PIN B TYPE

DESCRIPTION: CABLE ASS"Y