


P1.  
USB A M

P2.  
USB B M

WIRING DIAGRAM

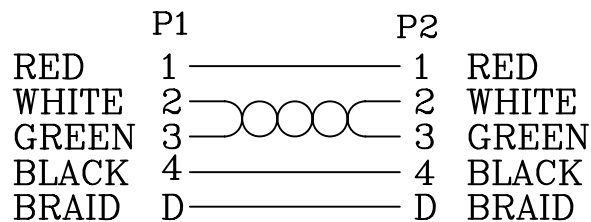

4	CORE	1	PCS	RH 12(OD)*6.5(ID)*L20mm
3	CONN.	1	PCS	USB B MALE SOLDER
2	CONN.	1	PCS	USB A MALE SOLDER
1	CABLE	2000	mm	UL2725 28AWG*1P(WHITE, GREEN)+24AWG*2C (RED, BLACK)+AEB OD:4.5mm #GRAY RE2.0
NO.	PART NO.	Q'TY	UNITS	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PPOJECTION



ORDER INFORMATION

UBX2-4A4B2V28FC-Mxxx-LF

SERIES | LEADFREE  
2M:2000mm  
5M:5000mm  
4 PIN A TYPE TO 4 PIN B TYPE | MALE TO MALE  
2.0 REV | FERRITE CORE  
28AWG

DESCRIPTION: USB A M /USB B M /2M/GRAY

煜倫股份有限公司

www.morethanall.com