


NOTE:

- 1.CONDUCTOR RESISTANCE:5 Ohms
- 2.INSULATION RESISTANCE:10M Ohms
- 3.HI-POT TEST:DC 300V
- 4.100% TEST OPEN,SHORT & MISWIRE

ITEM	NAME	DESCRIPTION	Q'TY
			1
4	PVC	45P BALCK PVC	12g
3	Conn.	USB B TYPE MALE	1
2	Conn.	USB 2.0 A TYPE MALE DOUBLE-SIDED SOLDER TYPE	1
1	Cable	UL2725 28AWG*1P+20AWG*2C+AL+B OD:5.0 BLACK L:1980mm	1

PIN OUT:

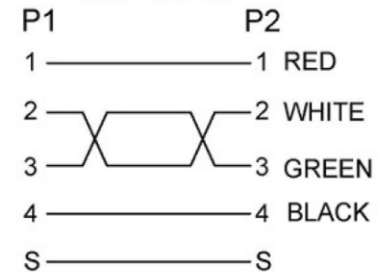

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-4B4C2028-M2M-LF

SERIES

LEADFREE

2000mm

MALE TO MALE

20.28 AWG

4 PIN B TYPE TO 4 PIN C TYPE

DESCRIPTION: