


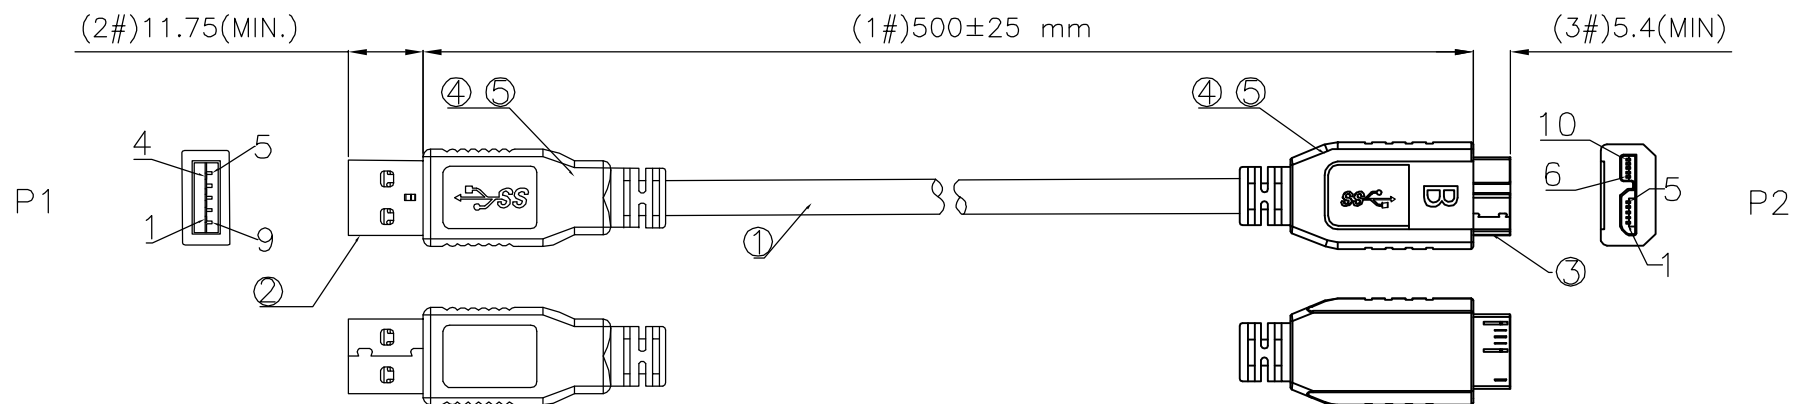

2.Note

FQC/OQC CHARACTERISTICS FOR EVALUATION: "#1,#2,#3" MEASURE

3.All Materials Shall Comply With RoHS

4.Specification

100% Open & Short Test

Contact Resistance: 3 ohm Max

Insulation Resistance: 5 Mega ohm Min
300 V DC/10 ms

Pin Out

P1	P2	
1	1	Red
2	2	White
3	3	Green
4	5	Drain
5	6	Blue
6	7	Yellow
7	8	D+D
8	9	Purple
9	10	Orange
Shell	Shell	Braid

Item	Name	Description	Q'TY	Unit
1	Wire	UL 20276(1P×28#+D+AL+Mylar)×2+1P×30#+1C×26#+AL+D+B PVC BLACK JACKET,OD:5.5±0.15 mm	A/R	mm
2	Conn	USB 3.1 AM/BLUE INSULATOR SOLDER TYPE	1	PCS
3	Conn	USB 3.1 MICRO B/M BLACK INSULATOR SOLDER TYPE	1	PCS
4	PE	PE NATURAL	A/R	g
5	PVC	45P PVC BLACK	A/R	g

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.25
.XXX ± 0.15
ANG ± 2°

PPOJECTION

照片框

ORDER INFORMATION

UBX2-9A10B262830-M50C-LF

SERIES

26/28/30 AWG

9A TO 10B TYPE

500mm

MALE TO MALE

LEADFREE

DESCRIPTION: USB 3.1 AM TO MICRO USB 3.1 BM L=500 mm