

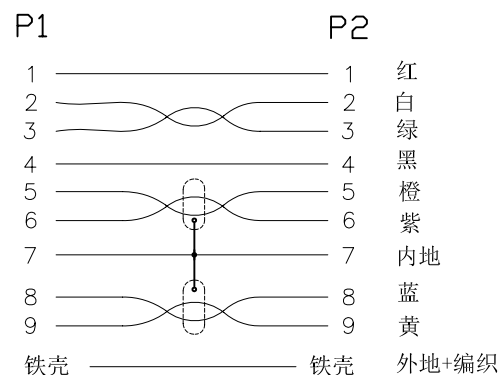


接线图

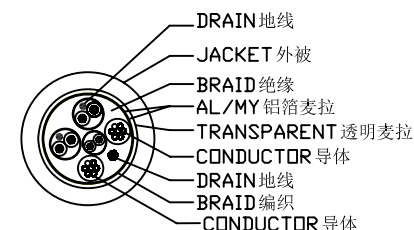

包装方式：单PCS透明袋包装：

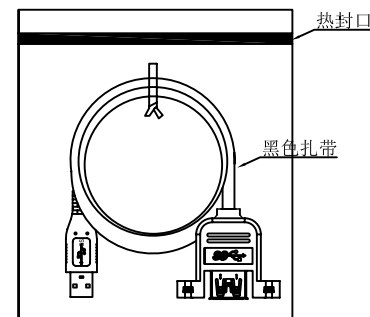

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE: 5M Ohms(Min)
4. CONDUCTIVE RESISTANCE:10 Ohms(Max)

PART LIST:本产品均符合“ROHS”环保标准，用的材料均为相当品。

4	PVC:45P BLACK.		Kg/1K
3	USB 3.0 AF TYPE GOLD 1U' CONNECTOR,NICKEL PLAIED SHELL,PLASTLC:BLUE.	1	SET
2	USB 3.0 AM TYPE GOLD 1U' CONNECTOR,NICKEL PLATED SHELL,PLASTIC:BLUE.	1	SET
1	UL2725 (7/0.12T*1P+D+AL+MYLAR)*2C+7/0.12T*1P+7*0.20T*2C+F+AD.(AL)OD:5.8mmBLACK	1	PCS
ITEM	STANDARD SPECIFICATION	Q' TY	UNIT

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

UBX2-9A9A2428PB-E50C-LF

SERIES

LEADFREE

500mm

MALE TO FEMALE

PANEL BACK

24,28 AWG

9 PIN A TYPE TO 9 PIN A TYPE

DESCRIPTION: USB 3.0 AM TO USB 3.0 AF帶耳 CABLE BLACK L=500MM