


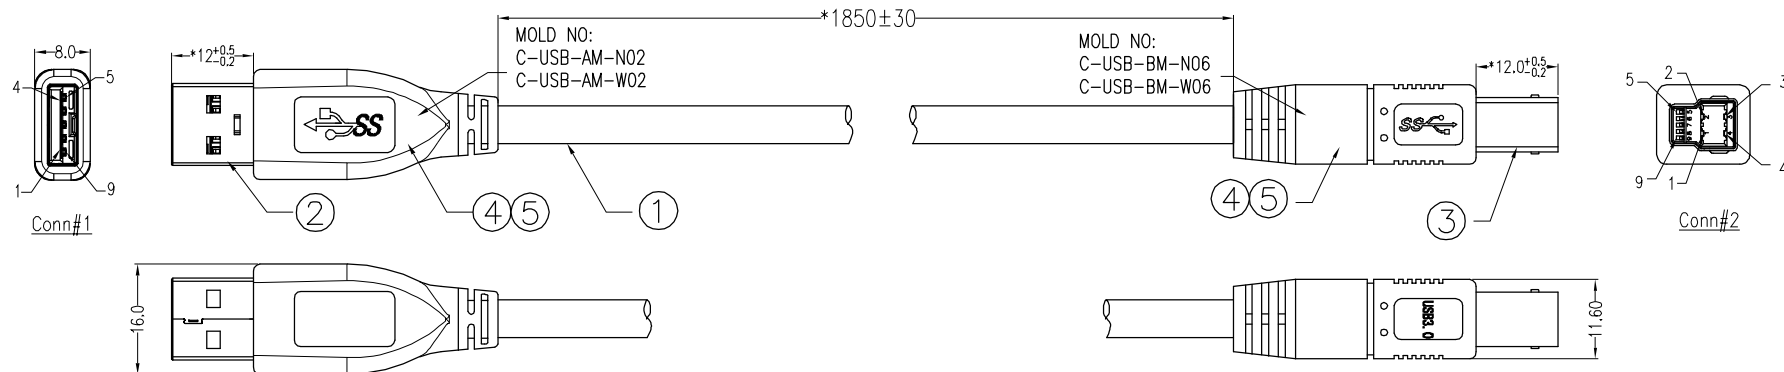

Pin Assignment

Conn#1			Conn#2		
VBUS	1	(Red)	1	VBUS	
D-	2	(White)	2	D-	
D+	3	(Green)	3	D+	
GND	4	(Black)	4	GND	
StdA_SSRX-	5	(Blue)	5	StdB_SSTX-	
StdA_SSRX+	6	(Yellow)	6	StdB_SSTX+	
GND_Drain	7	(GND)	7	GND_Drain	
GND_Drain	7	(GND)	7	GND_Drain	
StdA_SSTX-	8	(Purple)	8	StdB_SSRX-	
StdA_SSTX+	9	(Orange)	9	StdB_SSRX+	
Shield	Shell	(Braid)	Shell	Shield	

Notes:

1.ELECTRONIC TEST:

(1).100% OPEN SHORT & MIS-WIRE TEST.

(2).CONTACT RESISTANCE: 3ΩMAX

(3).INSULATION RESISTANCE:10MΩMin

(4).Contact Voltage:DC300V

2.Sample NO.

S-U3-00350

3.PART NO.

4."*"Dimension Must To Be QC.

5	OverMold	45P PVC WHITE	—
4	Pre-mold	LD-PE	—
3	CONN#2	USB 3.0 B MALE,SOLDER TYPE,INSULATOR BLUE,CONTACT GOLD PLATED 15U", SPCC SHELL NICKEL PLATED	1PCS
2	CONN#1	USB 3.0 A MALE,SOLDER TYPE,INSULATOR BLUE,CONTACT GOLD PLATED 15U", SPCC SHELL NICKEL PLATED	1PCS
1	CABLE	UL20276(28#x1P+D+AM)x2+28#x1P+24#x2C+F+AB(16/8TC) OD=5.5mm PVC Jacket White	1950mm
ITEM	NAME	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ± 0.35
.XX ± 0.25
.XXX ± 0.15
ANG ± 3°

照片框

ORDER INFORMATION

UBX2-9A9B2428-M1M85-LF

SERIES

LEADFREE

1850mm

24.28 AWG

9 A TO 9B TYPE

DESCRIPTION: USB 3.0 AM To USB 3.0 BM L=1850MM