

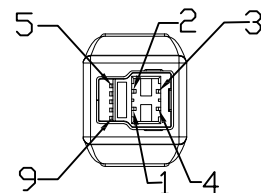
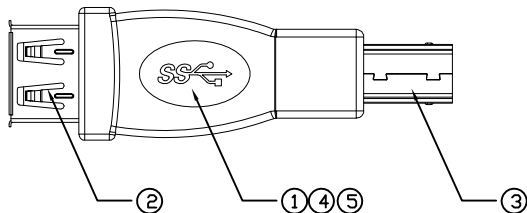


CONN.#1



CONN.#2

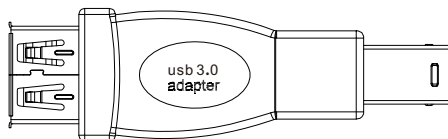

PIN ASSIGNMENT:

CONN.#1

CONN.#2

1	_____	1
2	_____	2
3	_____	3
4	_____	4
5	_____	8
6	_____	9
7	_____	7
8	_____	5
9	_____	6
SHELL	_____	SHELL

ELECTRICAL CHARACTER:

1. 100% OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE:20M Ohms(Min)
4. CONDUCTIVE RESISTANCE:1.0 Ohms(Max)

NO.	DESCRIPTION	QTY.	MATERIAL
5	OVERMOLD	7g	PVC 45P BLUE UL94V-0
4	INNERMOLD	2.5g	PE LOW DENSITY
3	CONN#2.	1	USB 3.0 BM 短體端子鍍金15U"
2	CONN#1.	1	USB 3.0 AF 銅殼鍍銀端子鍍金15U"
1	CABLE	10	電子線 7/0.12TC L=28mm

UBX2-AM-9A9B-LF  
LEADFREE

RoHS Compliant



PART NO. UBX2-AM-9A9B

DWG NO. UBX2-AM-9A9B

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

X. ±  
.X ± 0.50  
.XX ± 0.25  
.XXX ± 0.10  
ANG

DESCRIPTION:


CABLE ASSEMBLY,  
USB 3.0 A(F) TO USB BM

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

DATE