

RECOMMENDED P.C.B LAYOUT(TOP VIEW)
TOLERANCES: ±0.10mm

SPECIFICATION

MATERIAL

Insulator: PBT, rated UL94V-0 (standard)
Contacts: Brass (Male) ; Phosphor Bronze (Female)
Rivet,Boardlock: Copper alloy

CONTACT PLATING

Underplate: 50u" Nickel
Contact area: 1u"~30u" Selective gold
Solder tails area: 100u" Tin/Lead

ELECTRICAL

Operation voltage: 250 VAC max.
Current rating: 3 Amps max.
Contact resistance: 20 mohms max.
Insulation resistance: 3000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1000 VAC / minute
Operating temperature: -55°C TO +105°C

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X. ±


.X ±

.XX ±


.XXX ±

ANG ±

PPOJECTION



ORDER INFORMATION

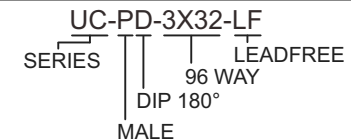

DESCRIPTION: DIN 41612 (THREE ROW) MALE 96PIN