
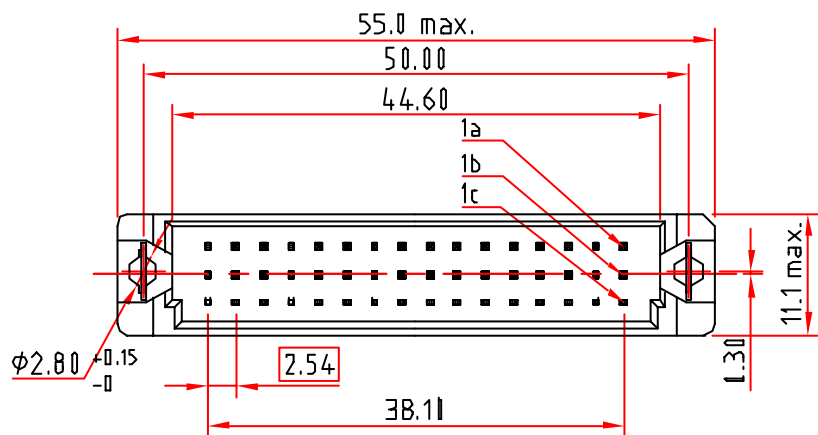



RECOMMENDED P.C.BOARD LAYOUT



NOTE:

1. TEMPERATURE RANGE: -55°C TO +125°C.
2. CURRENT RATING: 21°C 2A, 71°C 1A, 110°C 0.5A
3. CONTACT RESISTANCE: 30 MILLIOHMS MAX. AT DC100mA
4. DIELECTRIC VOLTAGE: AC 1000V FOR 1 MINUTE
5. INSULATION RESISTANCE: 1000 MEGOHMS MIN. AT DC500V
6. OPERATING VOLTAGE: 251VAC

③	OPTIONAL	BOARD-LOCK : BRASS, 100u" MIN. TIN PLATING
②	NO. OF POS.	CONTACT : BRASS, NICKEL PLATING OVER ALL AT 50 u" MIN. SOLDER AREA PLATING: 111u" MIN. TIN, CONTACT AREA PLATING GOLD
①	1	HOUSING : PBT UL94V-I, COLOR GRAY
ITEM	Q'TY	DESCRIPTION

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

照片框

ORDER INFORMATION

UC-PDZS15-3X16-LF
SERIES CLIP DIP 180° MALE
LEADFREE
48WAY
SEMI GOLD 15u"

DESCRIPTION: